

enhance





6

www.ultuxglobal.com

+91 82009-53712

info@ultuxglobal.com

Company Profile

As India's largest ceramics, porcelain tiles and sanitary ware manufacturer, we've been exporting premium products for over 12 years to 14+ countries. Using top-notch technology, we ensure best quality, timely delivery, and economical prices, making luxury accessible to all. our tagline, 'The Ultra Luxury' is our commitment to elevate every space. We prioritize customer satisfaction- Connect with us 24/7 and let's achieve excellence together! "



Exceeding The Limits To Always Get The Best

800x3000 MM





FEEL

CONTINUAL LAMBER

CONNECTING THE VALUE OF SLAB

CONTINUA+ is the most efficient, highest-productivity technology for the accurately managed manufacture of ceramic slabs and tiles, also producible with traditional bodies. The slabs are, in fact, formed without using a traditional press or mould, ensuring maximum flexibility in terms of size and thickness.







CONTINUA+ seamlessly integrates the powder forming phase and subsequent digital decoration. The key strengths of this exclusive process are high quality texturing and unrivalled surface shine.





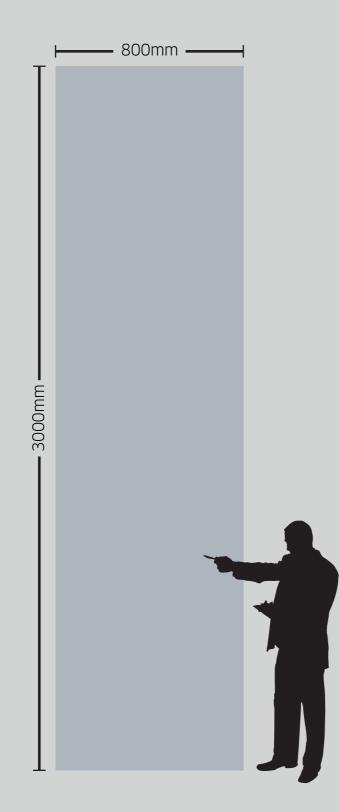

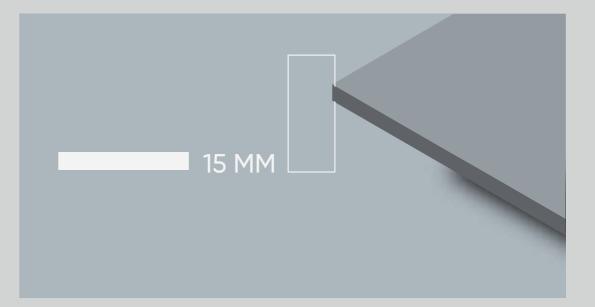


characterizing..

15 mm is set aside for the most demanding product applications such as kitchen countertops.

The thicknesses are one of the most important elements




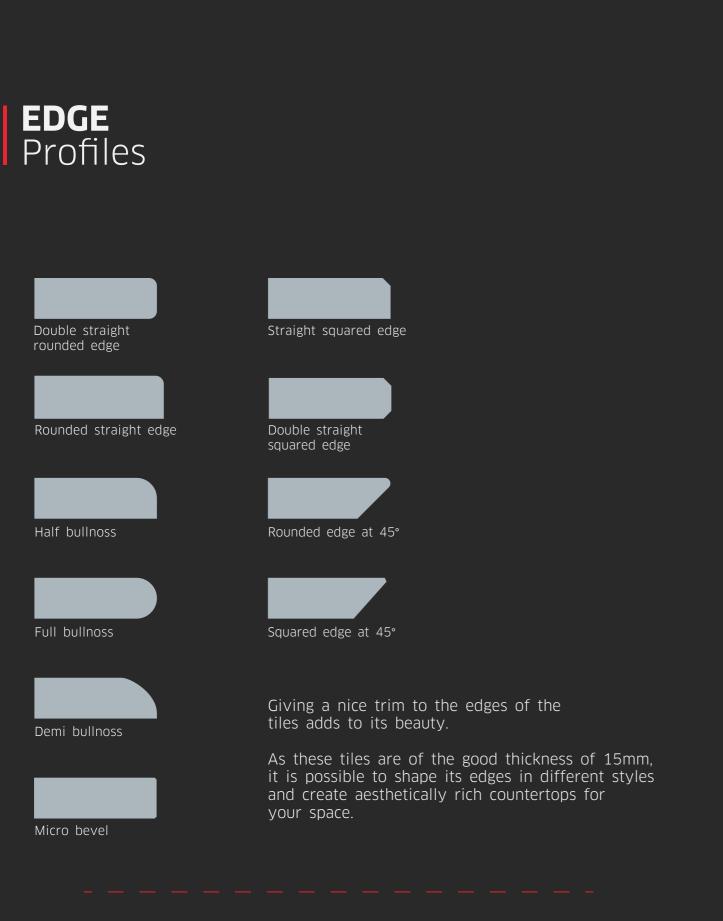

JOINT POSSIBILITIES





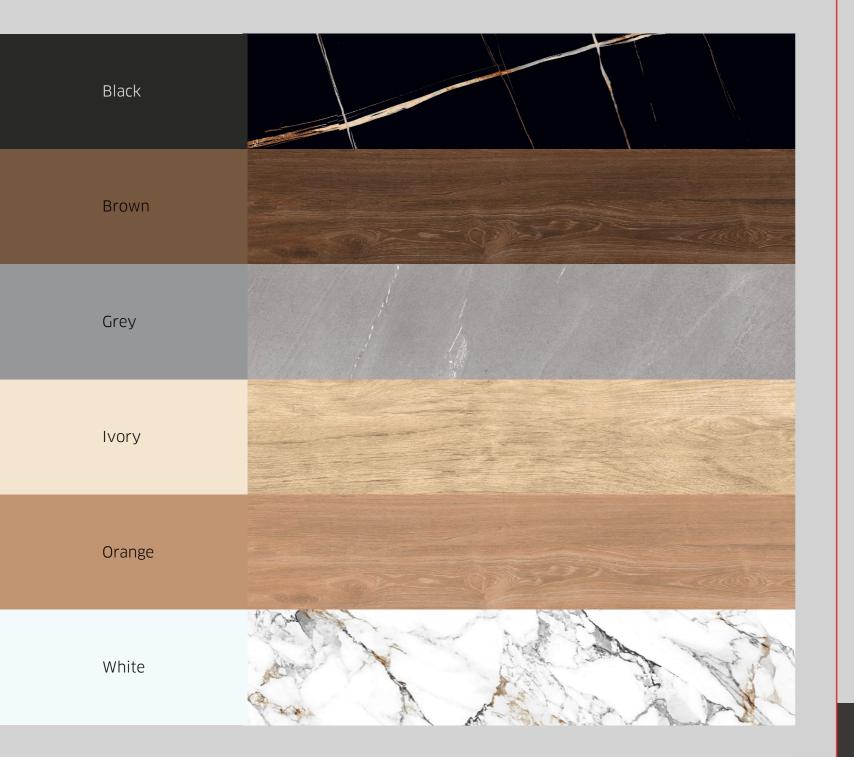

Our collections offer professional-grade performance while seamlessly blending the latest innovations with a premium design aesthetic that is crafted with authentic, high-quality materials.

The Functionality of The Residential Kitchen

Elevating Classic Style or Today's Homeowner

FEEL

Leading Edge Design and Innovation





Lourent Gold

Porte Noir



Natural Pine Dark



Grey Flurry



Light Veneer









Calcatta Ultra



Herozin White



Machia Vechia



Statuario Altissimo





Smoke Walnut

Grey Zinc

Oak Natural

Pietra Grey

Borghini Oro

Delmare

Lasa Covelano



Cocoa Veneer

Metal Black



Versace Gold



Natural Pine Light
















Mont Blanc





Lava Statuario







FEEL

A matte finish with a light layer of enamel for subtle shine and a pleasantly soft touch. Surface finish which is easy to clean.







P

 \bigcirc

 \bigcirc

. J°

Ť.


ବ

0

۲


*

APPLICATION	
Areas	

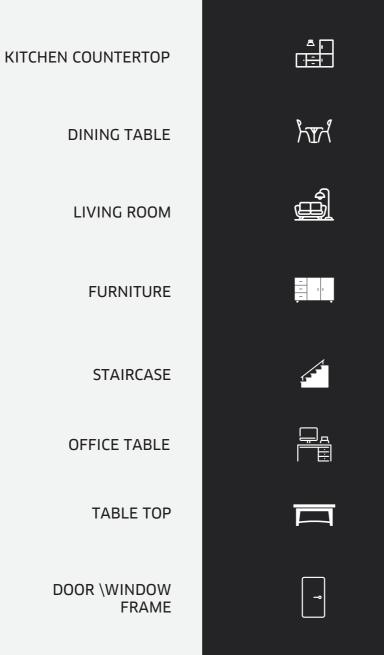



FEEL

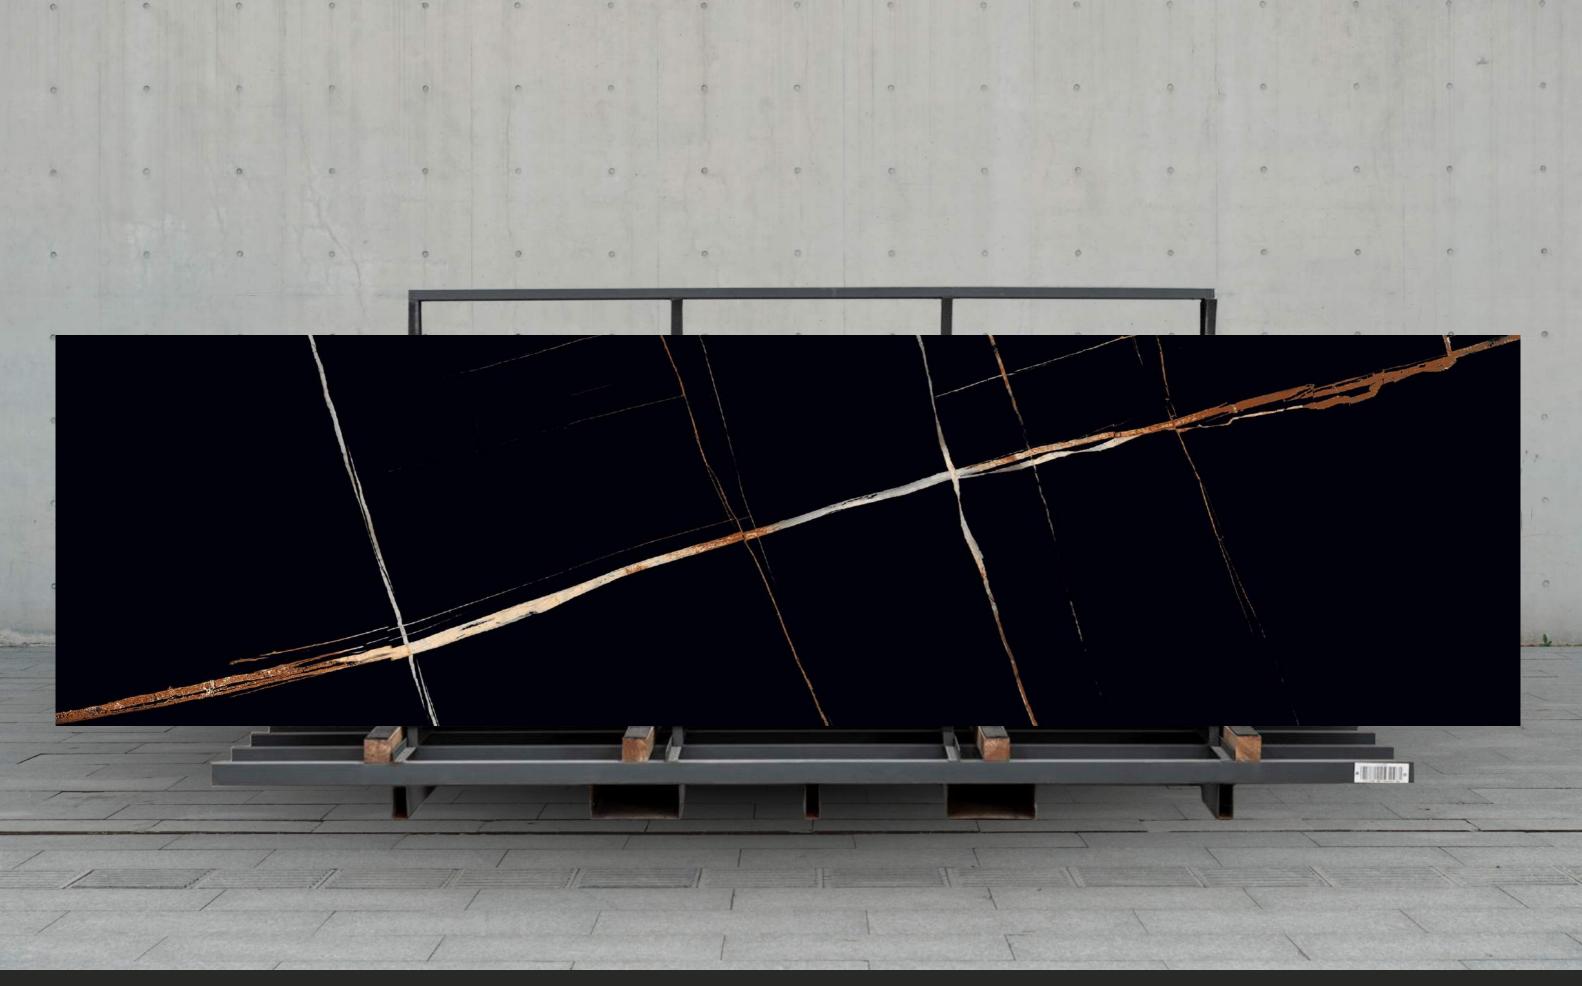

LOURENT GOLD

BODY	FINISH	SIZE
BLACK BODY	MATT	800 X

800x3000 MM



MARQUINA NERO

BODY	FINISH	SIZE
BLACK BODY	MATT	800 X

800x3000 MM



METAL BLACK

BODY	FINISH	SIZE
BLACK BODY	MATT	800 X

800x3000 MM



PORTE NOIR

BODY	FINISH	SIZE
BLACK BODY	MATT	800 X

800x3000 MM



WAVE BLACK

BODY	FINISH
BLACK BODY	MATT

800x3000 MM




COCOA VENEER

BODY	FINISH
BROWN BODY	MATT

800x3000 MM

SIZE

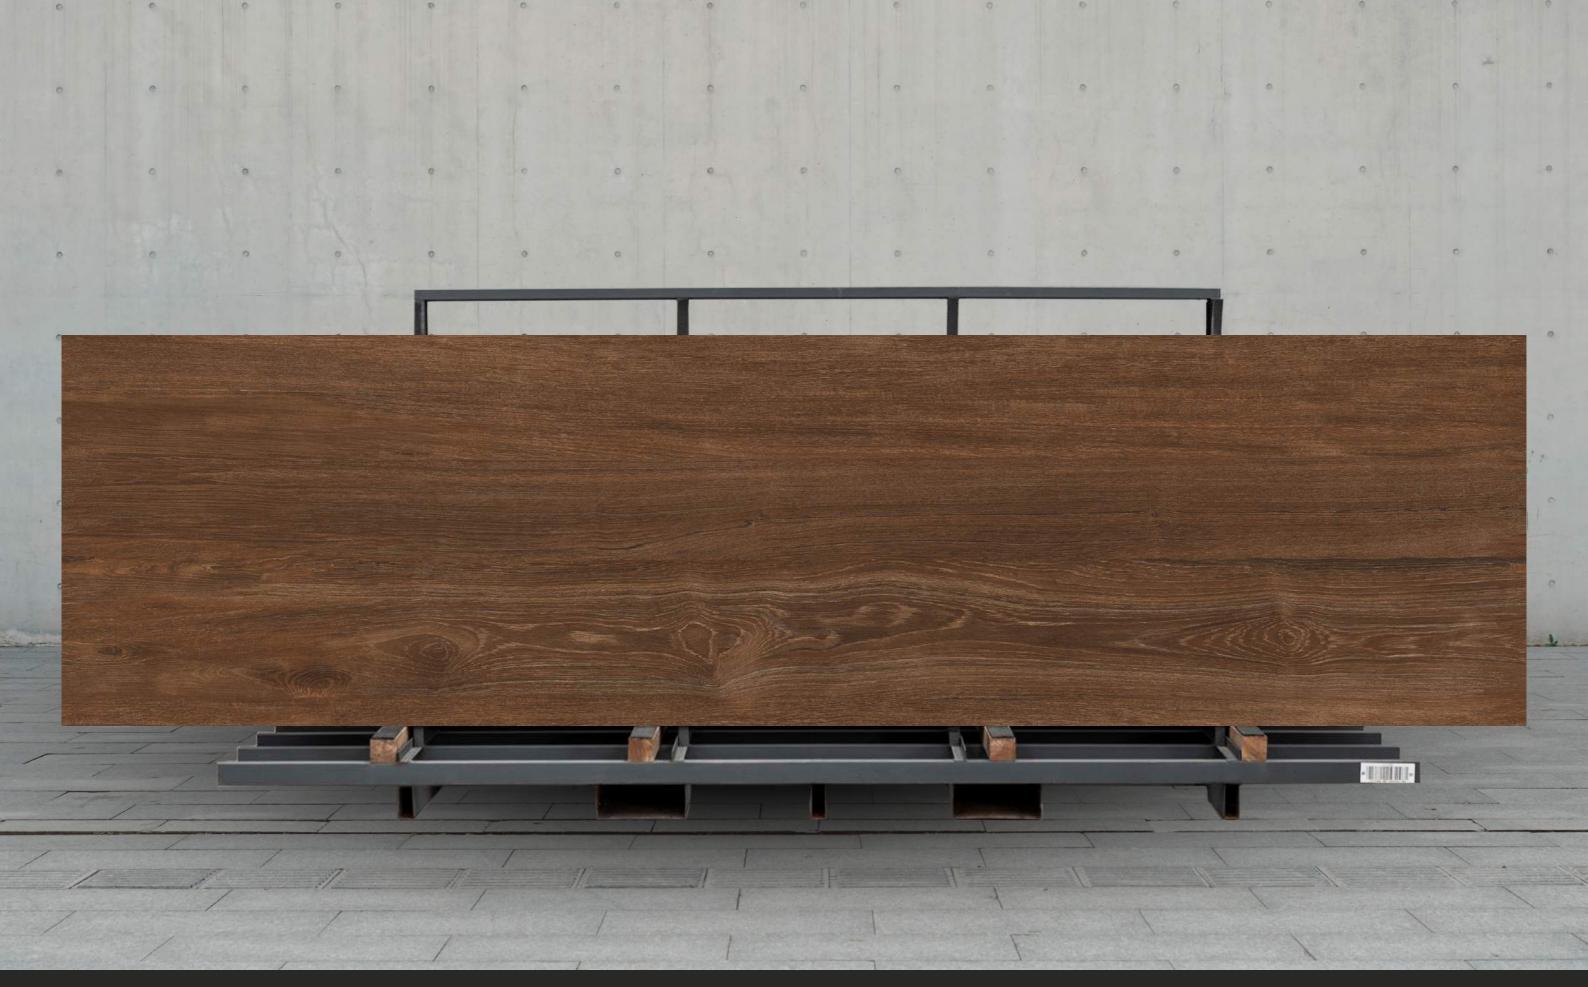

NATURAL PINE DARK

BODY	FINISH
BROWN BODY	MATT

SIZE **800**x

800x3000 MM




SMOKE WALNUT

BODY	FINISH
BROWN BODY	MATT

SIZE **800**x

800x3000 MM

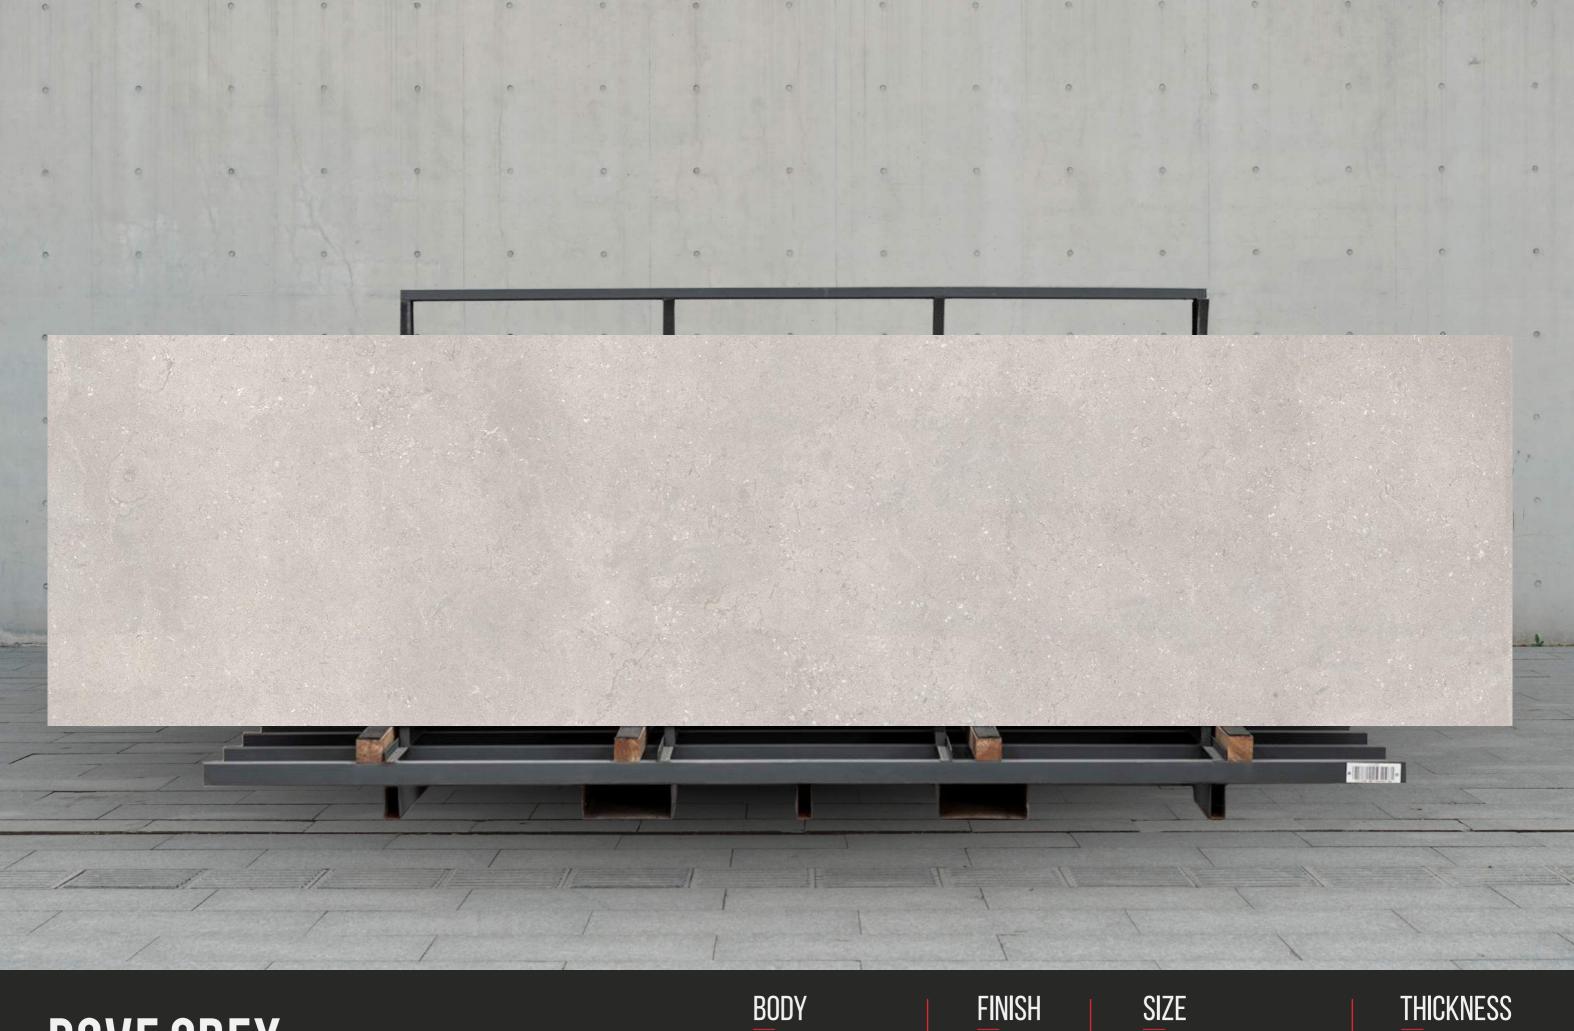



BODY	FINISH
GREY BODY	MATT

800x3000 MM



GREY FLURRY

BODY	FINISH	SIZE
GREY BODY	MATT	800 X

800x3000 MM





BODY	FINISH	S
GREY BODY	MATT	8

SIZE **Boo**x**3000 MM**



VERSACE GOLD

BODY	FINISH	SIZE
GREY BODY	MATT	800 X

800x3000 MM




LIGHT VENEER

BODY	FINISH
IVORY BODY	MATT

800x3000 MM


SIZE

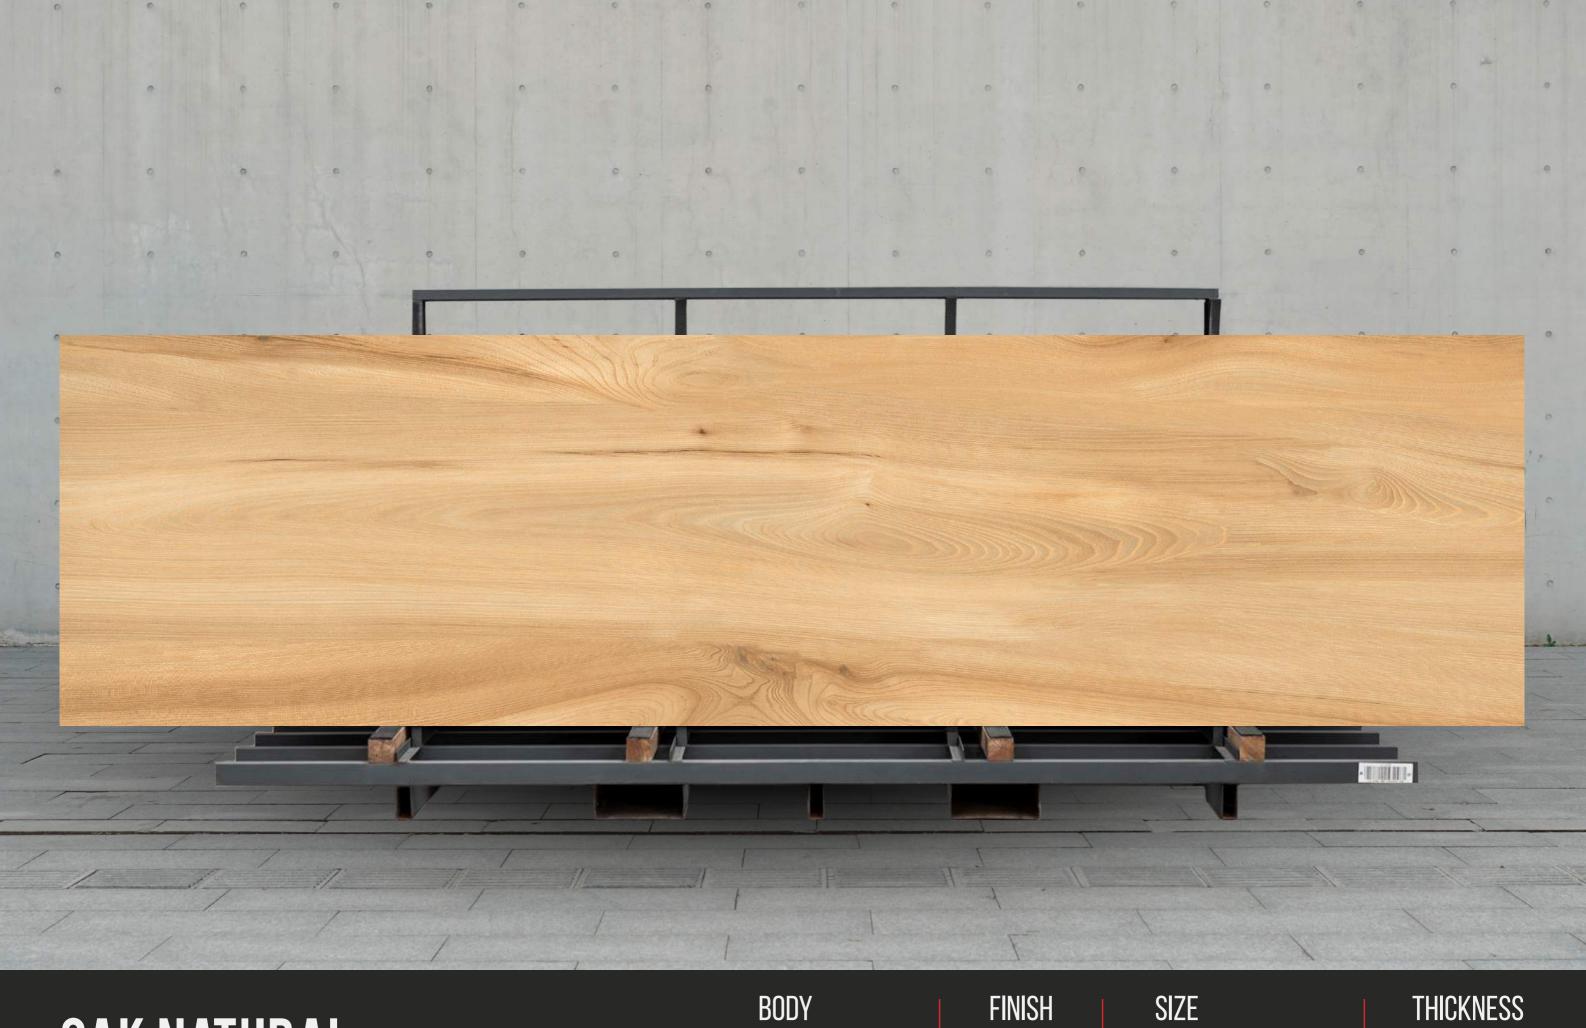

OAK NATURAL

BODY	FINISH
IVORY BODY	MATT

800x3000 MM

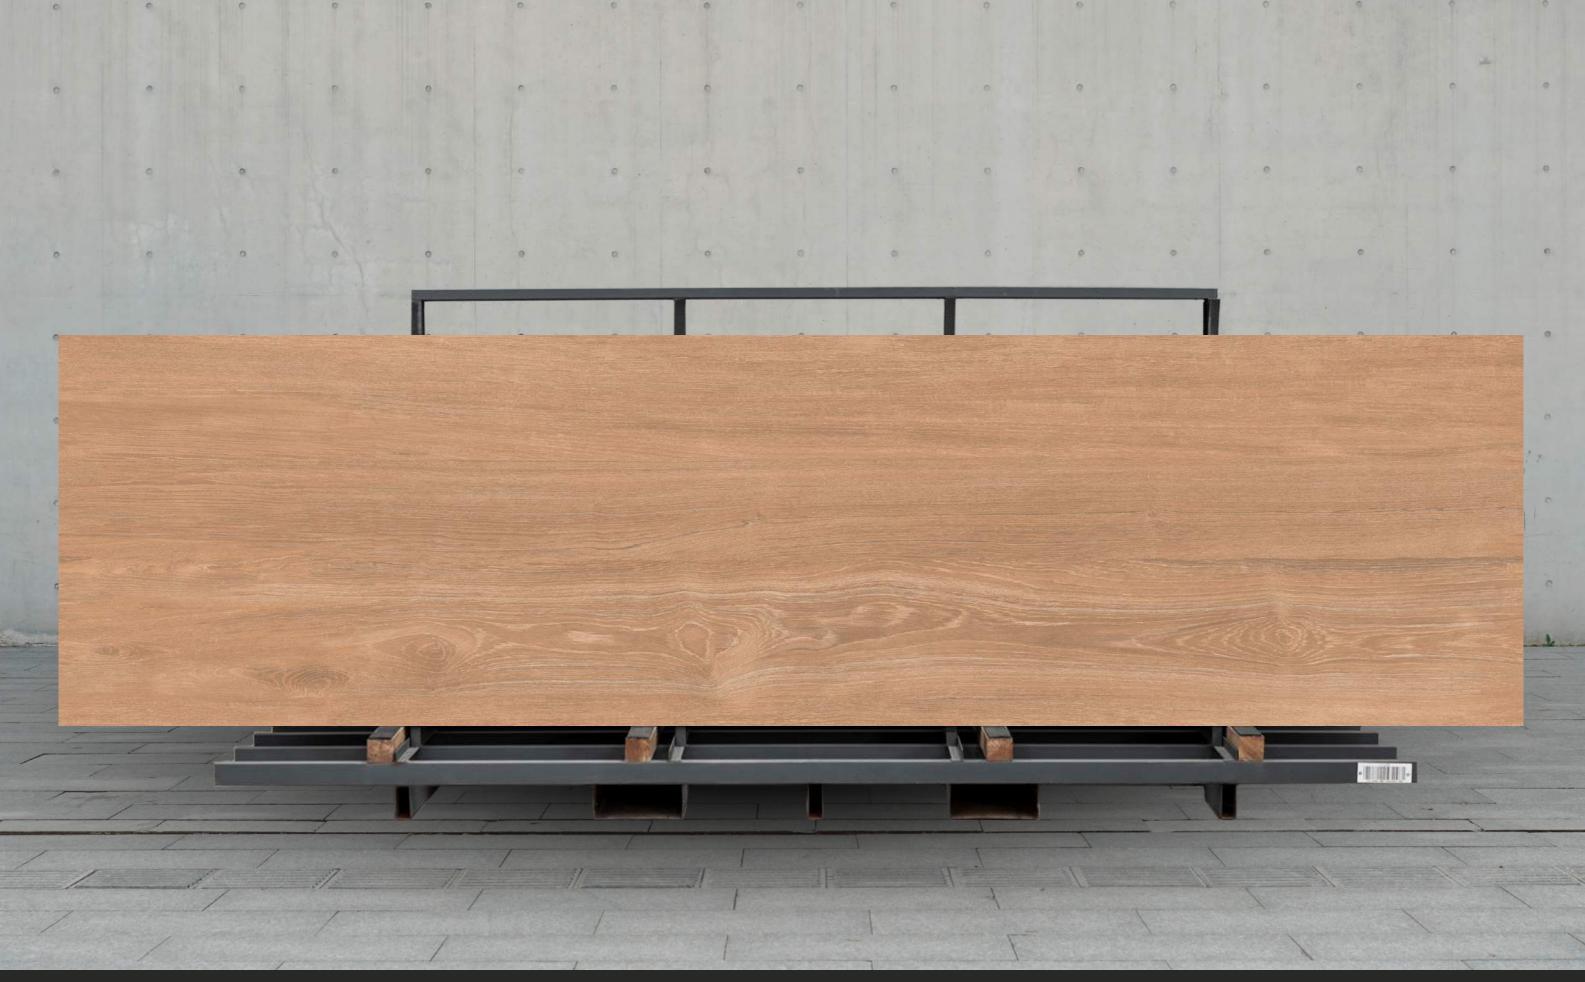

NATURAL PINE LIGHT

BODY	FINISH
ORANGE BODY	MATT

SIZE **800**x

800x3000 MM





BODY Wall Street Grey Body finish **Matt**



800×3000 MM



PIETRA GREY

BODY Wall Street Grey Body finish **Matt** SIZE **800**x


800x3000 MM



ARABESCATO GOLD

BODY	FINISH	SIZE
WHITE BODY	MATT	800 X

800x3000 MM

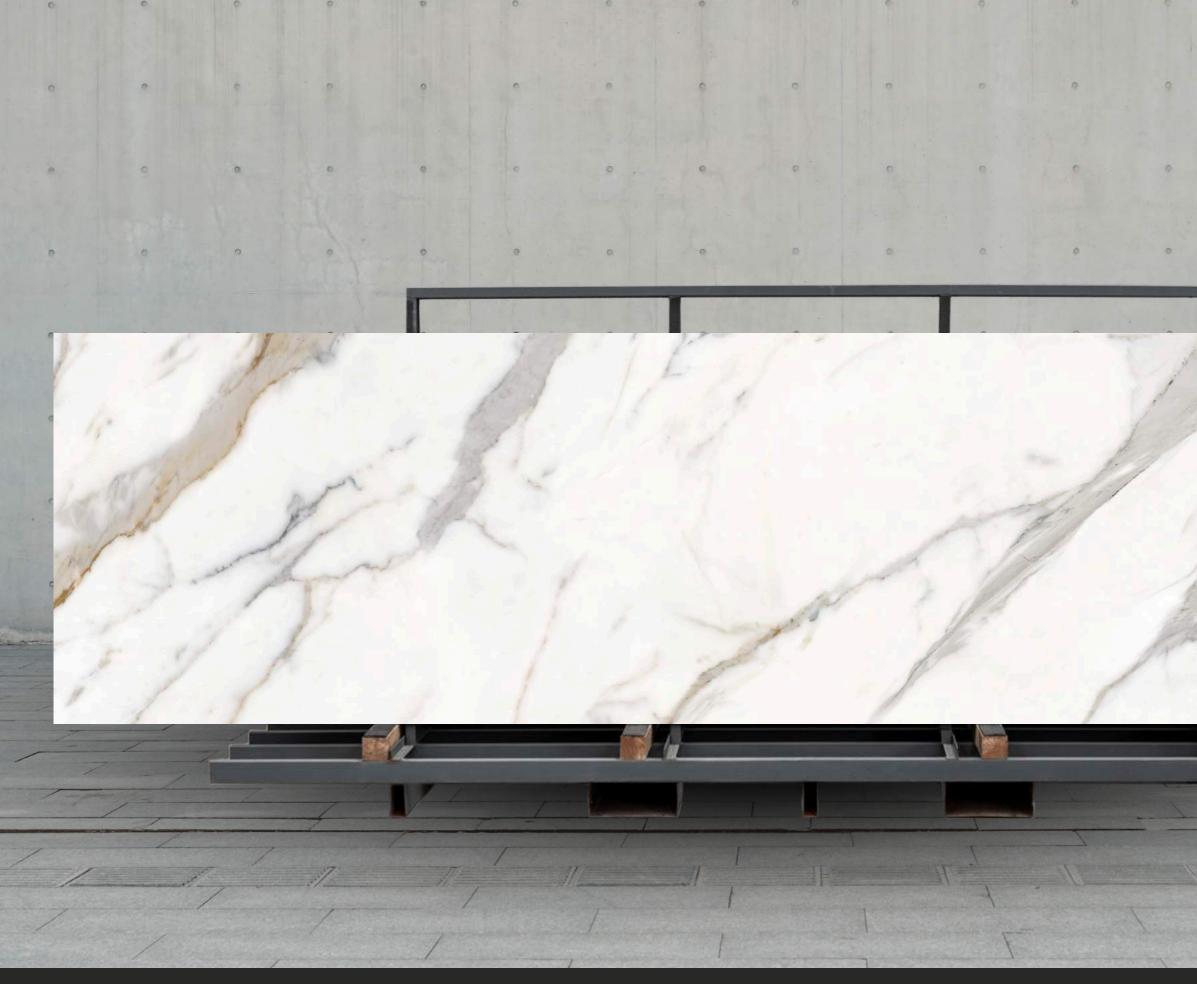


BIANCO EXTRA

BODY	FINISH	SIZE
WHITE BODY	MATT	800 X



THICKNESS **15 MM**

· # # # # # #

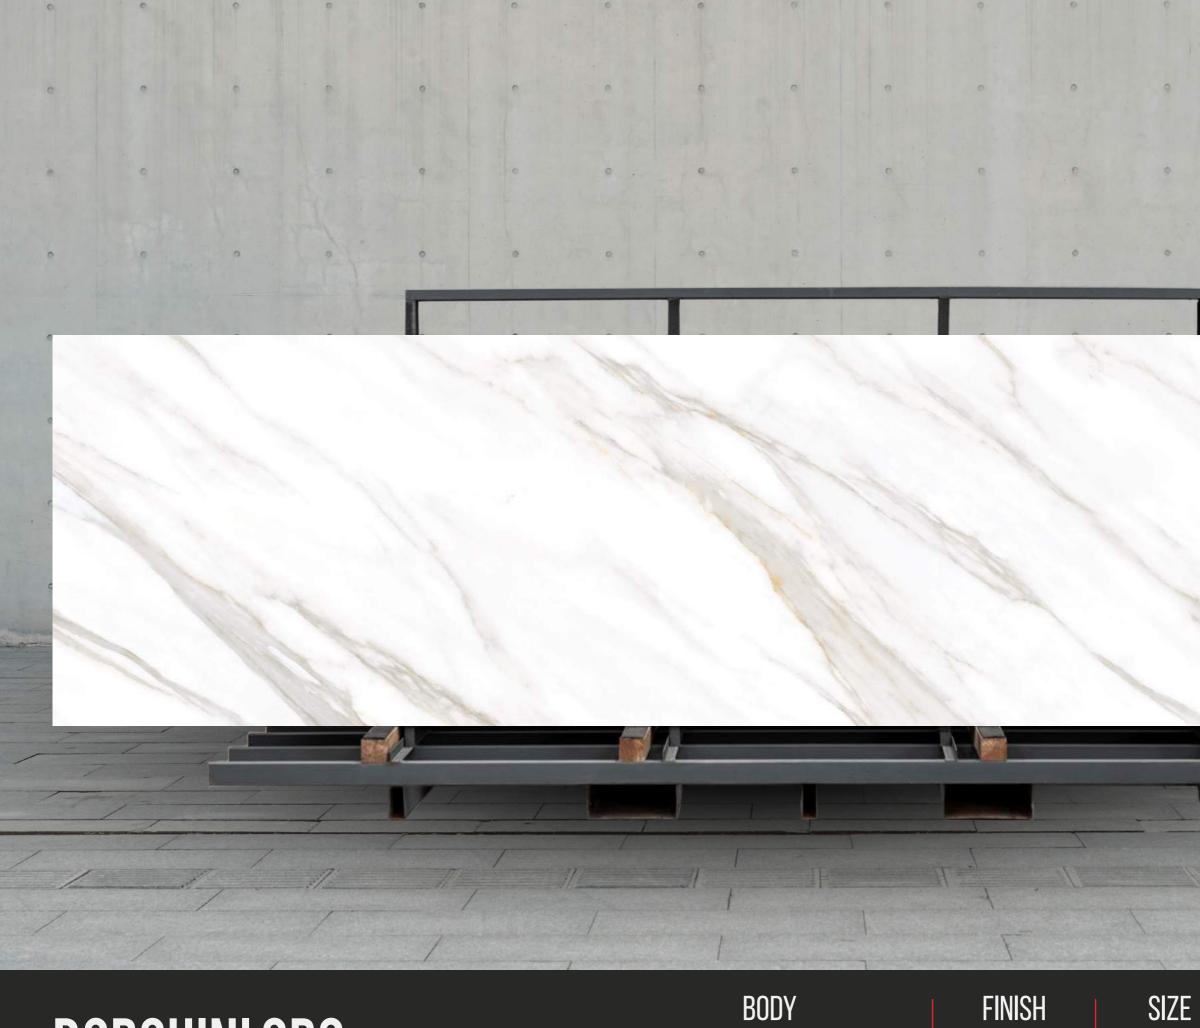


BORGHINI ORO

BODY	FINISH	(
WHITE BODY	MATT	8

800x3000 MM


THICKNESS **15 MM**

· #100000

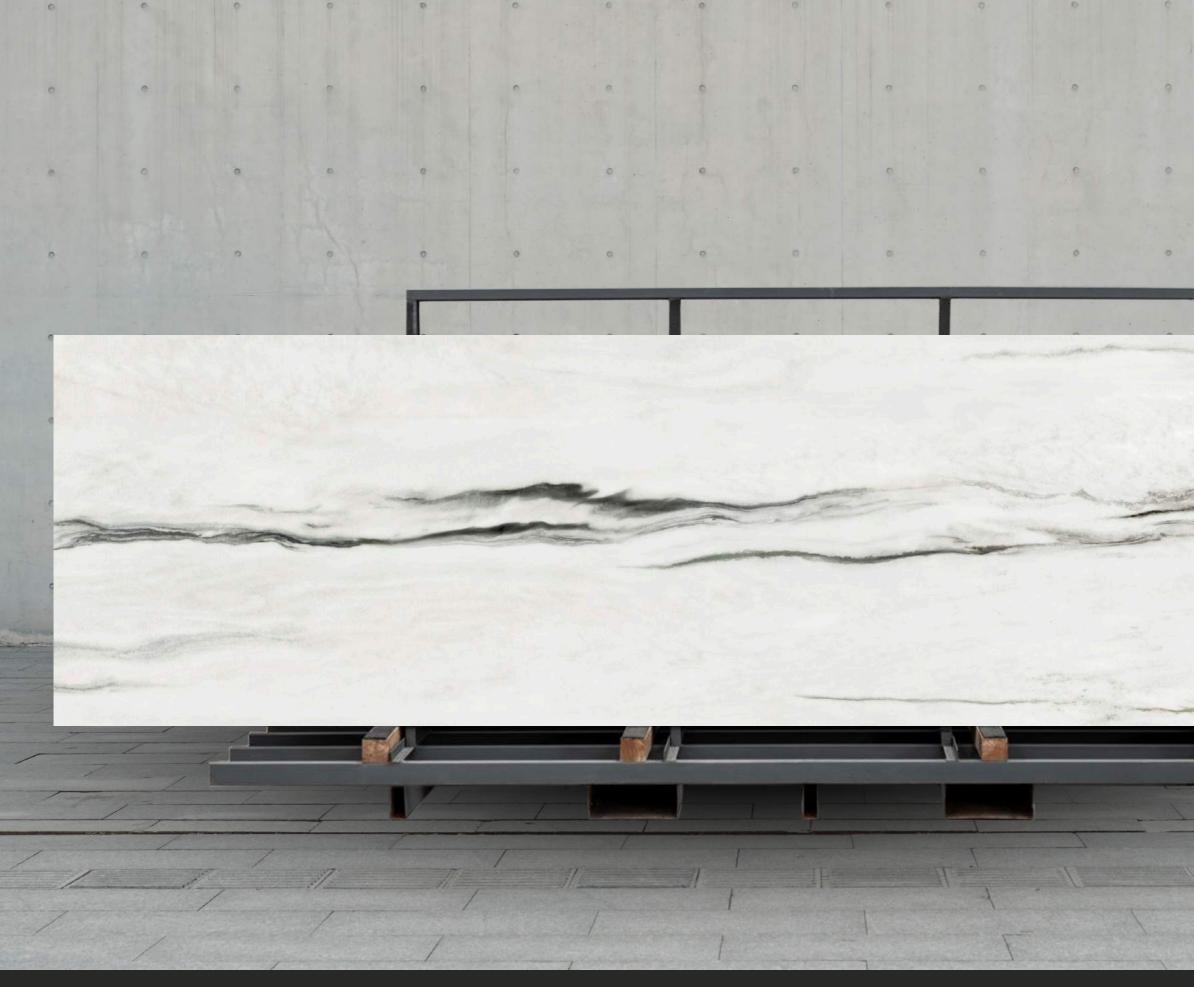



BODY	FINISH	SIZ
WHITE BODY	MATT	80




THICKNESS **15 MM**

·100001-



CALCATTA ULTRA

BODY	FINISH	S
WHITE BODY	MATT	8



THICKNESS **15 MM**


·10000





BODY	FINISH	SIZE
WHITE BODY	MATT	800 X

800x3000 MM

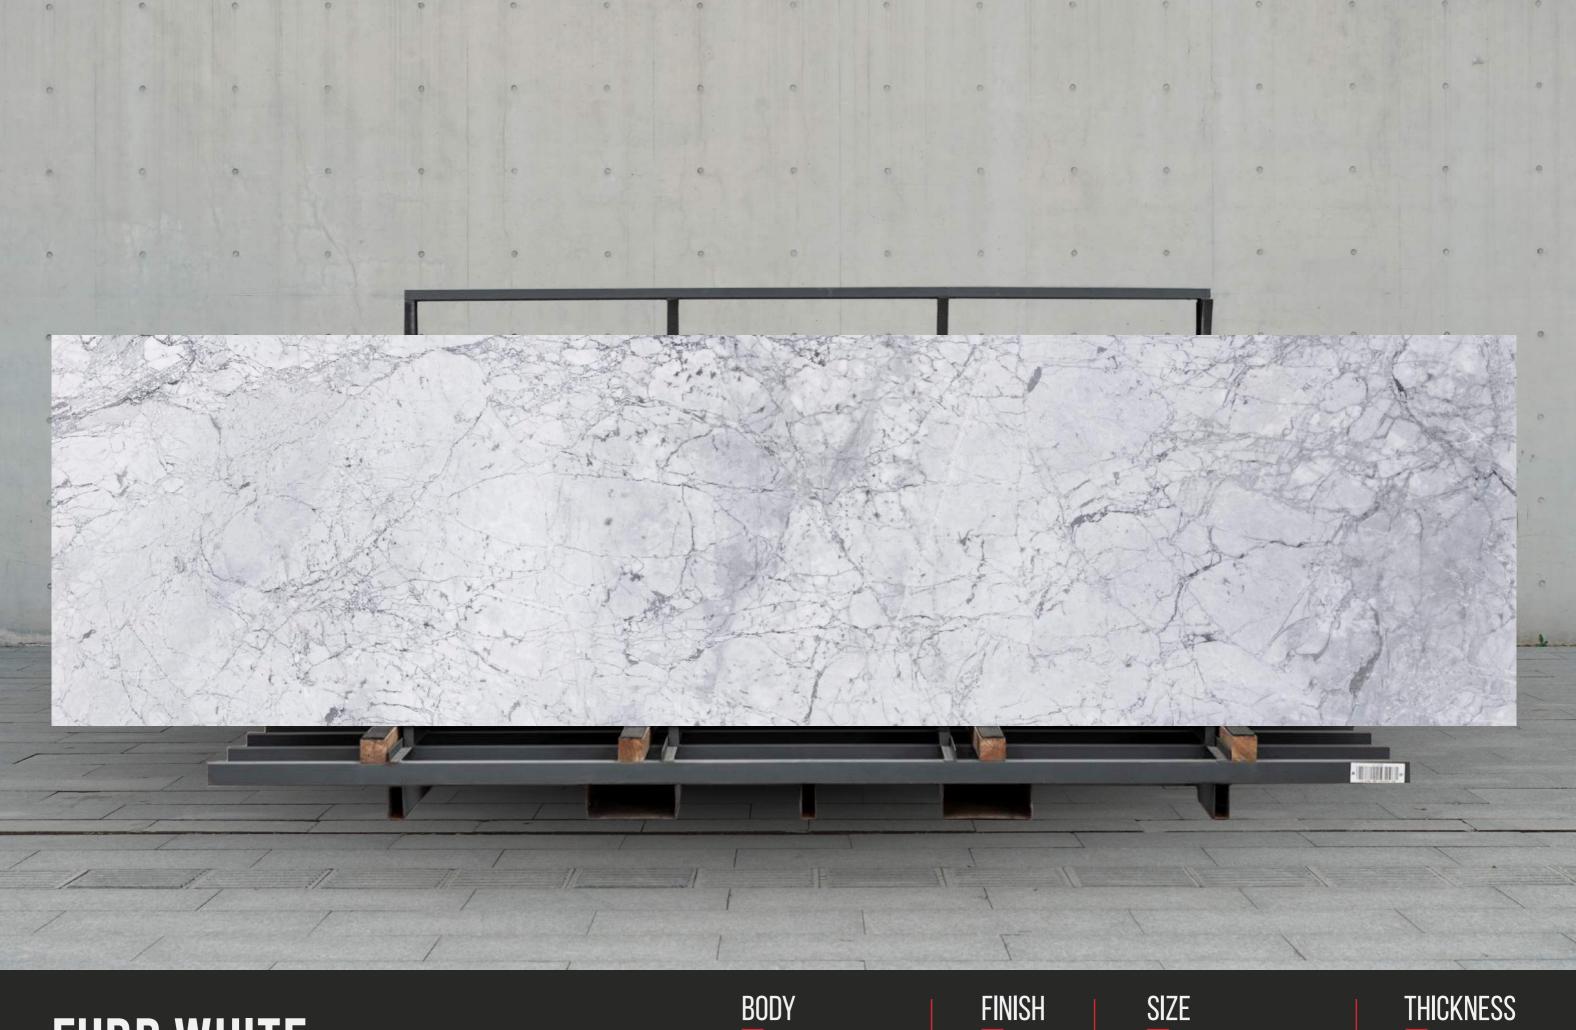

FURR WHITE

BODY	FINISH
WHITE BODY	MATT


800x3000 MM



HEROZIN WHITE

BODY	FINISH	SIZE
WHITE BODY	MATT	800 X


800x3000 MM

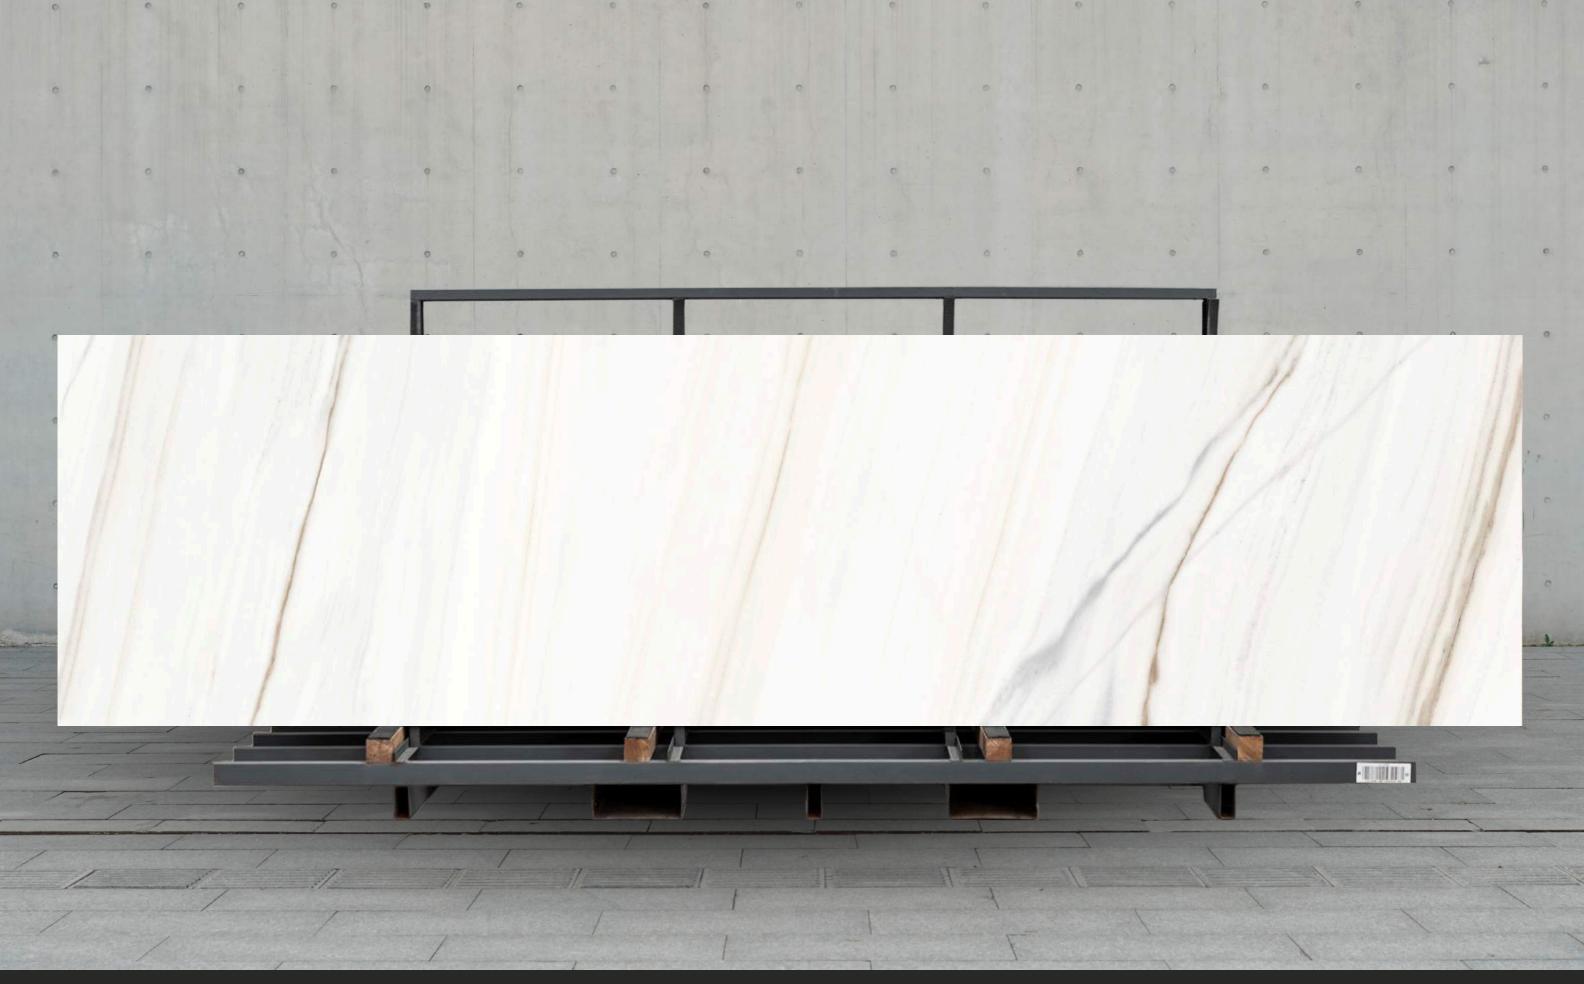

LASA COVELANO

BODY	FINISH	SIZE
WHITE BODY	MATT	800 X

800x3000 MM

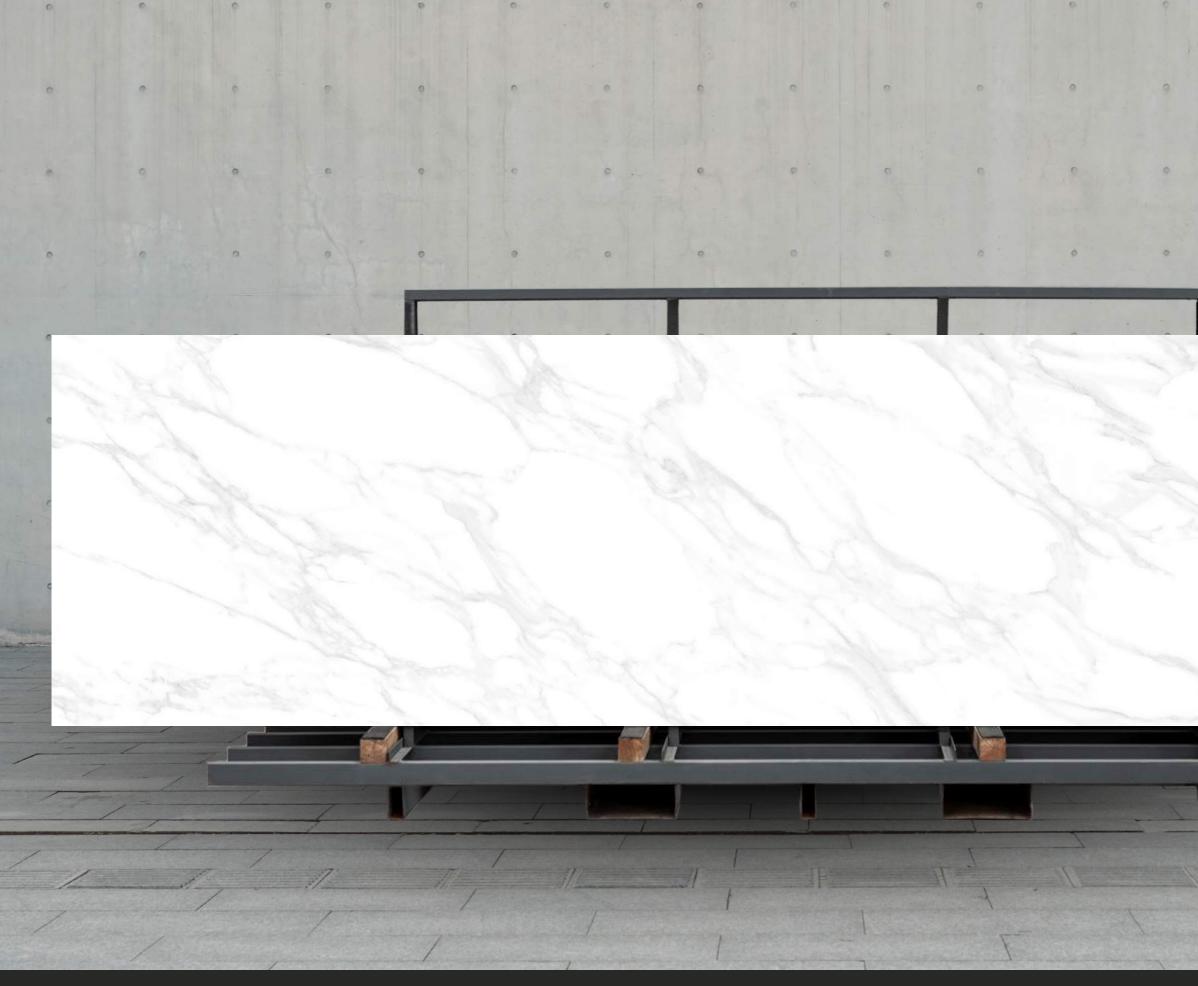


LAVA STATUARIO

BODY	FINISH	SIZE
WHITE BODY	MATT	800 X

800x3000 MM

THICKNESS **15 MM**

·IIIIII

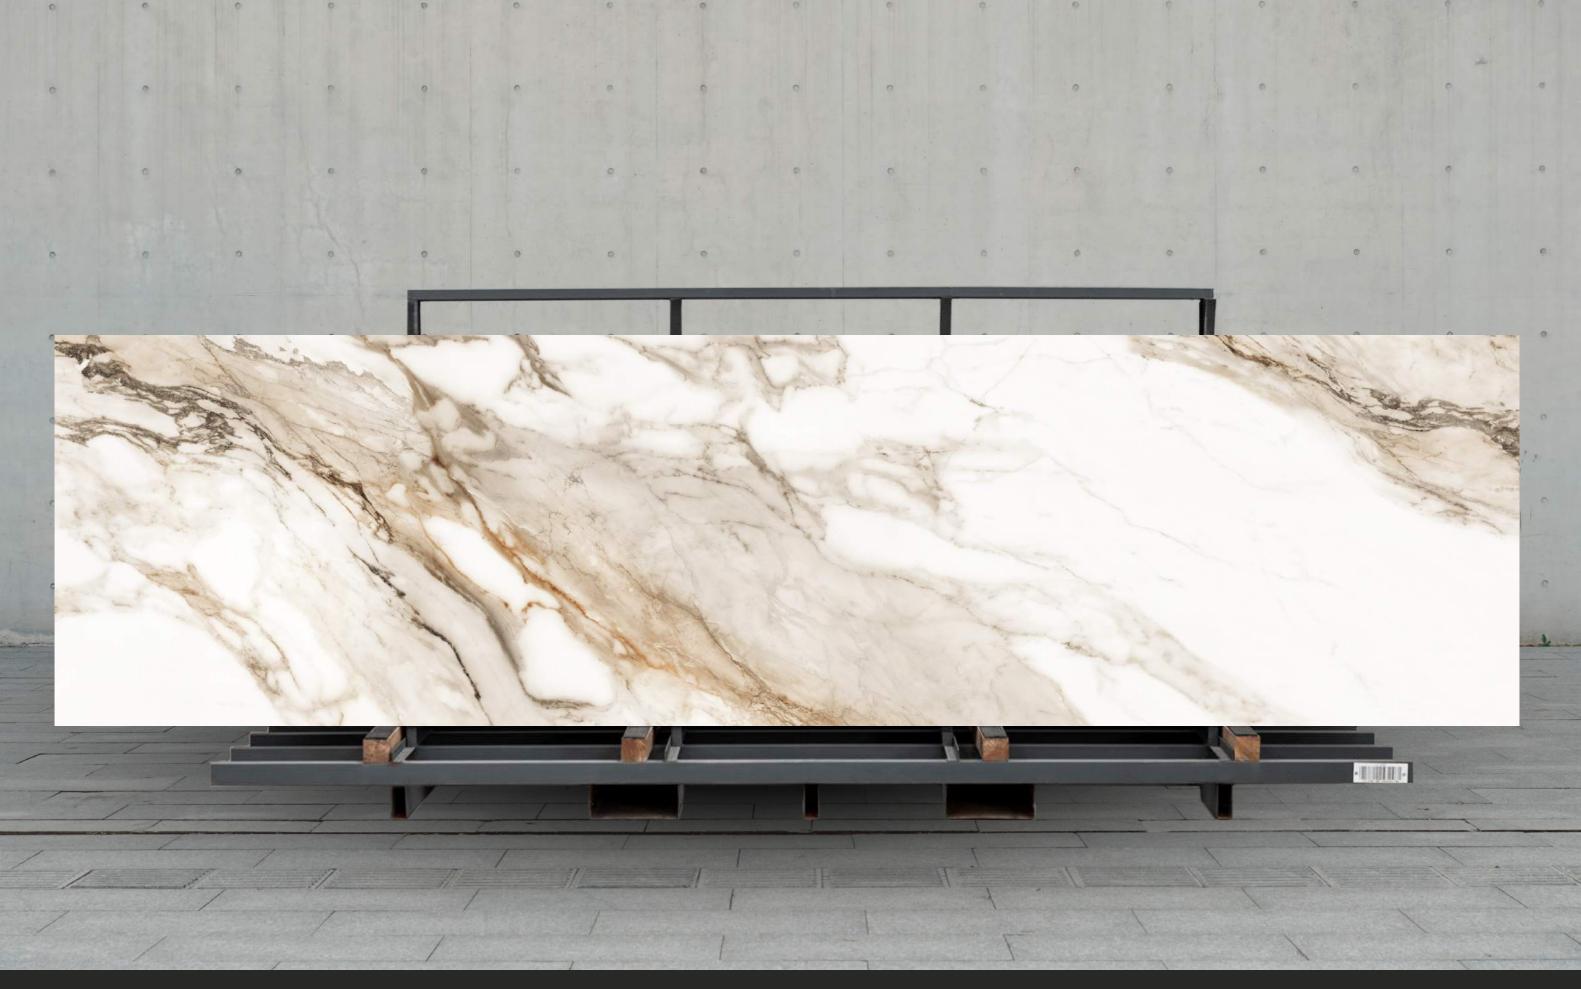

MACHIA VECHIA

BODY	FINISH	SIZE
WHITE BODY	MATT	800 X

800x3000 MM



MONT BLANC

BODY	FINISH	SIZE
WHITE BODY	MATT	800 X

800x3000 MM



PEARL CREAM ONYX

BODY	FINISH
WHITE BODY	MATT

800x3000 MM



STATUARIO ALTISSIMO


BODY	FINISH
WHITE BODY	MATT

SIZE



THICKNESS **15 MM**

- # 10 m -

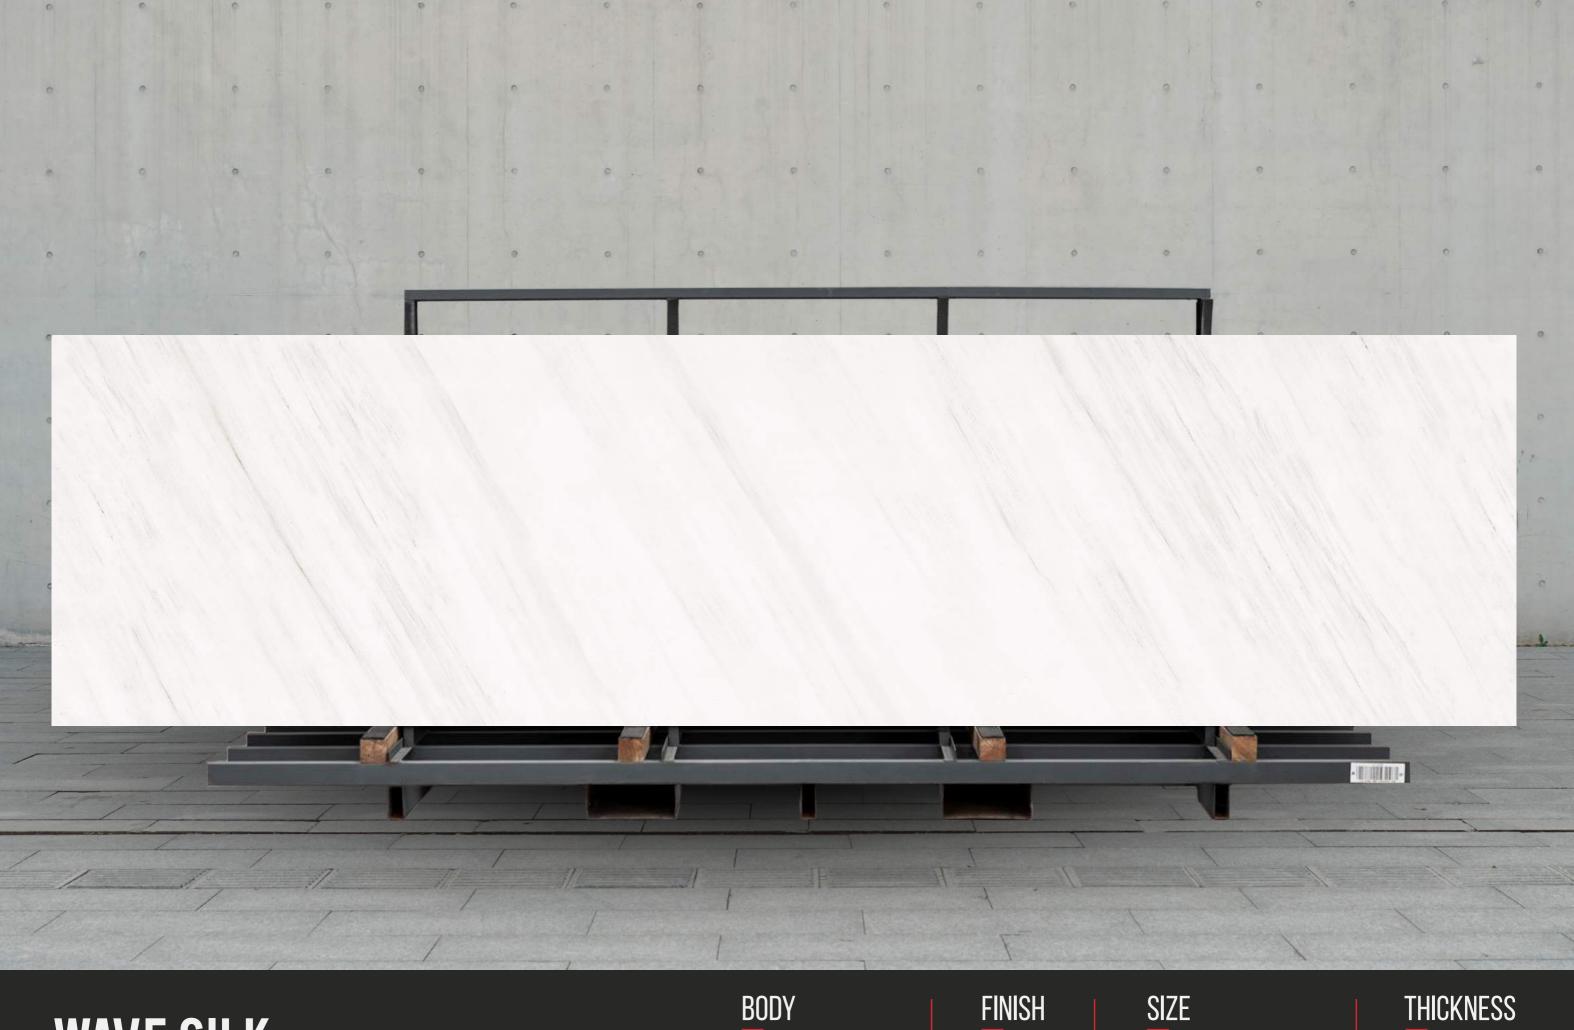



BODY	FINISH	(
WHITE BODY	MATT	8

800x3000 MM

Technical Specification

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla
Regulatory Properties	
Deviation in Length and Width	± 0.30 % (±1.00mm)
Deviation in Thickness	± 5.00 % (±0.50mm)
Straightness in Side	± 0.30 % (±0.80mm)
Rectangularity	± 0.30 % (±1.50mm)
Surface Flatness Central Curvature	± 0.40 % (±1.80mm)
Surface Flatness Edge Curvature	± 0.40 % (±1.80mm)
Surface Flatness Warpage	± 0.40 % (±1.80mm)
Surface Quality	> 95% defects free
Small Color Difference(for Plain Colour)	∆E < 1.00
Glossiness (Polished)	as per mfg.
Glossiness (Matt)	as per mfg.
Glossiness (Satin/Posh)	as per mfg.
Structural Properties —	
Water absorption	≤ 0.50 %
Bulk density	as per mfg.
Massive Mechanical Properties	
Modulus of rupture	Min. 35.0 N/mm ²
Breaking strength thickness <7.5	Min. 700.0 N
Breaking strength thickness ≥7.5	Min. 1300.0 N
Breaking strength thickness ≼1755mm)	Min. 1300.0 N
Surface Mechanical Properties	
MOH'S hardness #	as per mfg.
Surface abrasion resistance #	as per mfg.
Deep abrasion resistance #	Max. 175mm
Thermal Hydrometric Properties —	
Moisture expansion	Max. 0.06%(0.6mm/m)
Thermal expansion(COE) at 100°C	as per mfg.
Thermal shock resistance	Min. 10 Cycle
Impact resistance(COR) #	Min. 0.55
Frost resistance	as per mfg.
Chemical Properties	
Resistance to staining glazed	Min. Class 3
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB
Resistance to low concentrate acid and alkalis glazed	as per mfg.
Resistance to high concentrate acid and alkalis glazed Safety Properties	as per mfg.
Skid resistance(DCOF-DRY) ##	as per mfg.
Slip resistance(DCOF)(R value) ## Fire resistance	as per mfg.
	as per mfg.

* With Nano polished ** Except Hydrofluoric Acid & it's compound # Tiles Intended for use on floor ## As per customer requirement

Packing Details

PRODUCT	BODY	SIZE	THICKNESS
Matt	Color Body	800x3000mm	15mm

Cleaning & Maintenance

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE
Grease	Alkaline - Solvent	Detergent
Oil	Solvent	Ammonia, Backing Soda
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic
Lime	Acid	Descaling Reagent, Hydro Chloric Acid
Cement	Acid	Hydro Chloric Acid
Wine	Alkaline	Ammonia, Liquid Bleach
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach
Rubber	Solvent	Alcohol, Thinner
Plaster	Acid	Hydro Chloric Acid
Candle Wax	Solvent	Alcohol, Thinner
lodine	Oxidant	Liquid Bleach
Blood	Oxidant	Liquid Bleach
Ice Cream	Alkaline	Liquid Bleach

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

MEAN	VALUE
------	-------

TEST METHOD

± 0.10 %	ISO 10545-2
± 5.00 %	ISO 10545-2
± 0.10 %	ISO 10545-2
± 0.10%	ISO 10545-2
± 0.50 %	ISO 10545-2
± 0.50 %	ISO 10545-2
± 0.50 %	ISO 10545-2
> 95% defects free	ISO 10545-2
∆E < 0.30	ISO 10545-16
Gloss Value> 90	Gloss Meter 60°
3 <gloss td="" value<7<=""><td>Gloss Meter 60°</td></gloss>	Gloss Meter 60°
7 <gloss td="" value<18<=""><td>Gloss Meter 60°</td></gloss>	Gloss Meter 60°
≤ 0.060 %	ISO 10545-3
Min. 2.28 g/cc	ISO 10545-3
Min. 42.0 N/mm ²	ISO 10545-4
Min. 1000.0 N	ISO 10545-4
Min. 1800.0 N	ISO 10545-4
Min. 7500.0 N	ISO 10545-4
Glossy Min. 4*/ Posh Min. 6	BS EN 15771
Glossy Min. 2/ Posh Min. 3	ISO 10545-7
Max. 132mm	ISO 10545-6
Max. 0.02mm/m	ISO 10545-10
Max. 6.0 x 1 0 5	ISO 10545-8
Min. ¹ 0 Cycle	ISO 10545-9
Min. 0.55	ISO 10545-5
Frost Proof	ISO 10545-12
Min. Class 4	ISO 10545-14
Min. Class GA	ISO 10545-13
Min. Class GLB**	ISO 10545-13
Min. Class GHB**	ISO 10545-13
Glossy PO($<^{12}$) / Posh $\ge P^1(^{12}-^24)$	BS 7976-2
R9 to R ¹³	DIN 51130
Fire Proof	N.A.

TILES / BOX	COVERAGE AREA / BOX	WEIGHT (Kgs)

ULTUX GLOBAL

+91 82009-53712

www.ultuxglobal.com

info@ultuxglobal.com