

elevate

elegance

enhance



ULTUX GLOBAL
THE ULTRA LUXURY



ULTUX GLOBAL
THE ULTRA LUXURY

Company Profile

As India's largest ceramics, porcelain tiles and sanitary ware manufacturer, we've been exporting premium products for over 12 years to 14+ countries. Using top-notch technology, we ensure best quality, timely delivery, and economical prices, making luxury accessible to all. our tagline, 'The Ultra Luxury' is our commitment to elevate every space. We prioritize customer satisfaction- Connect with us 24/7 and let's achieve excellence together! "

2024

600 X 600 mm
Porcelain tiles



SUGAR & CARVING MATT SERIES

SUGAR & CARVING SERIES




VENZA-BEIGE

600 X 600 mm
Porcelain tiles



SUGAR & CARVING SERIES

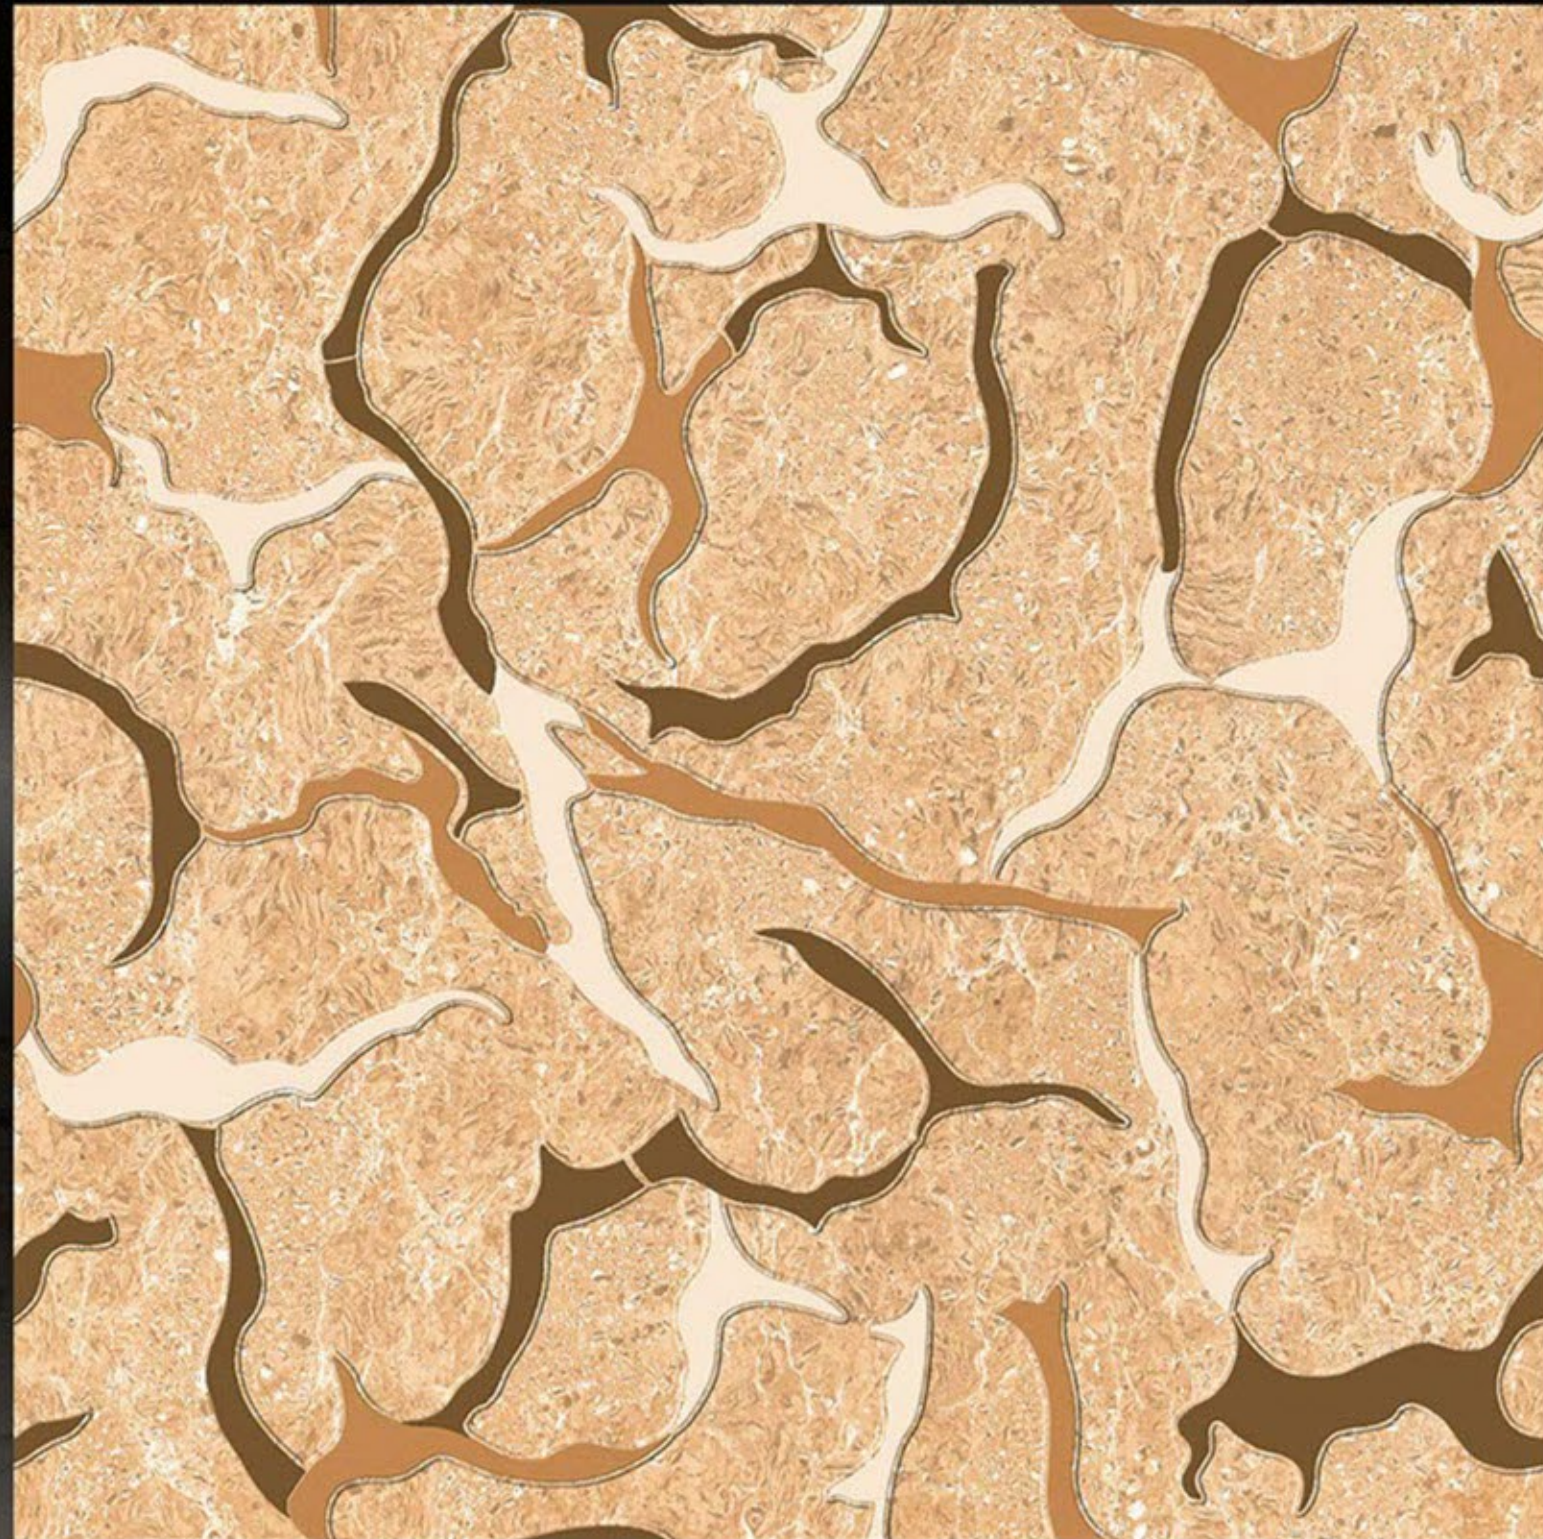

VENZA-BROWN

600 X 600 mm
Porcelain tiles



SUGAR & CARVING SERIES




VENZA-CREMA

600 X 600 mm
Porcelain tiles




SUGAR & CARVING SERIES

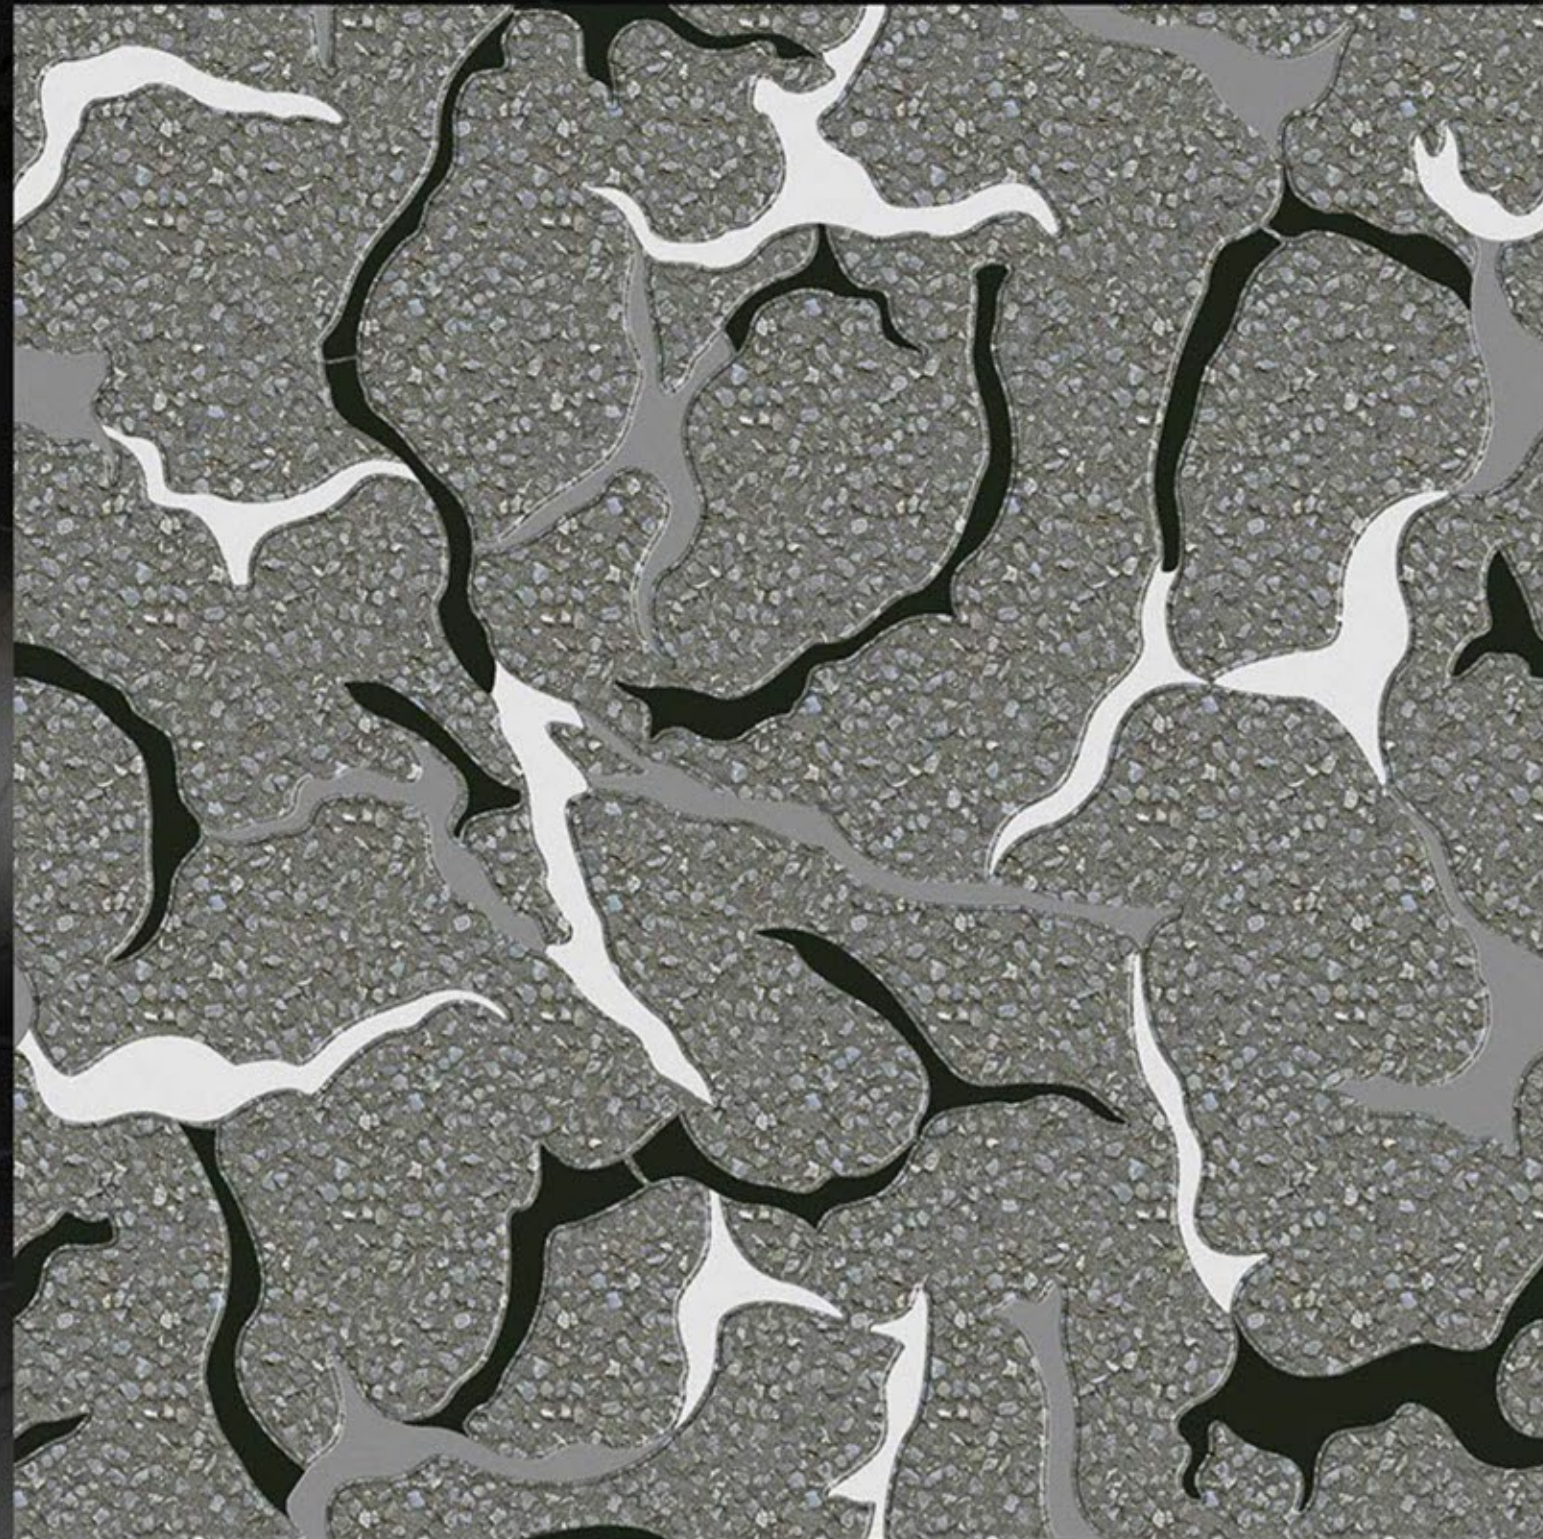

VENZA-DARK

600 X 600 mm
Porcelain tiles

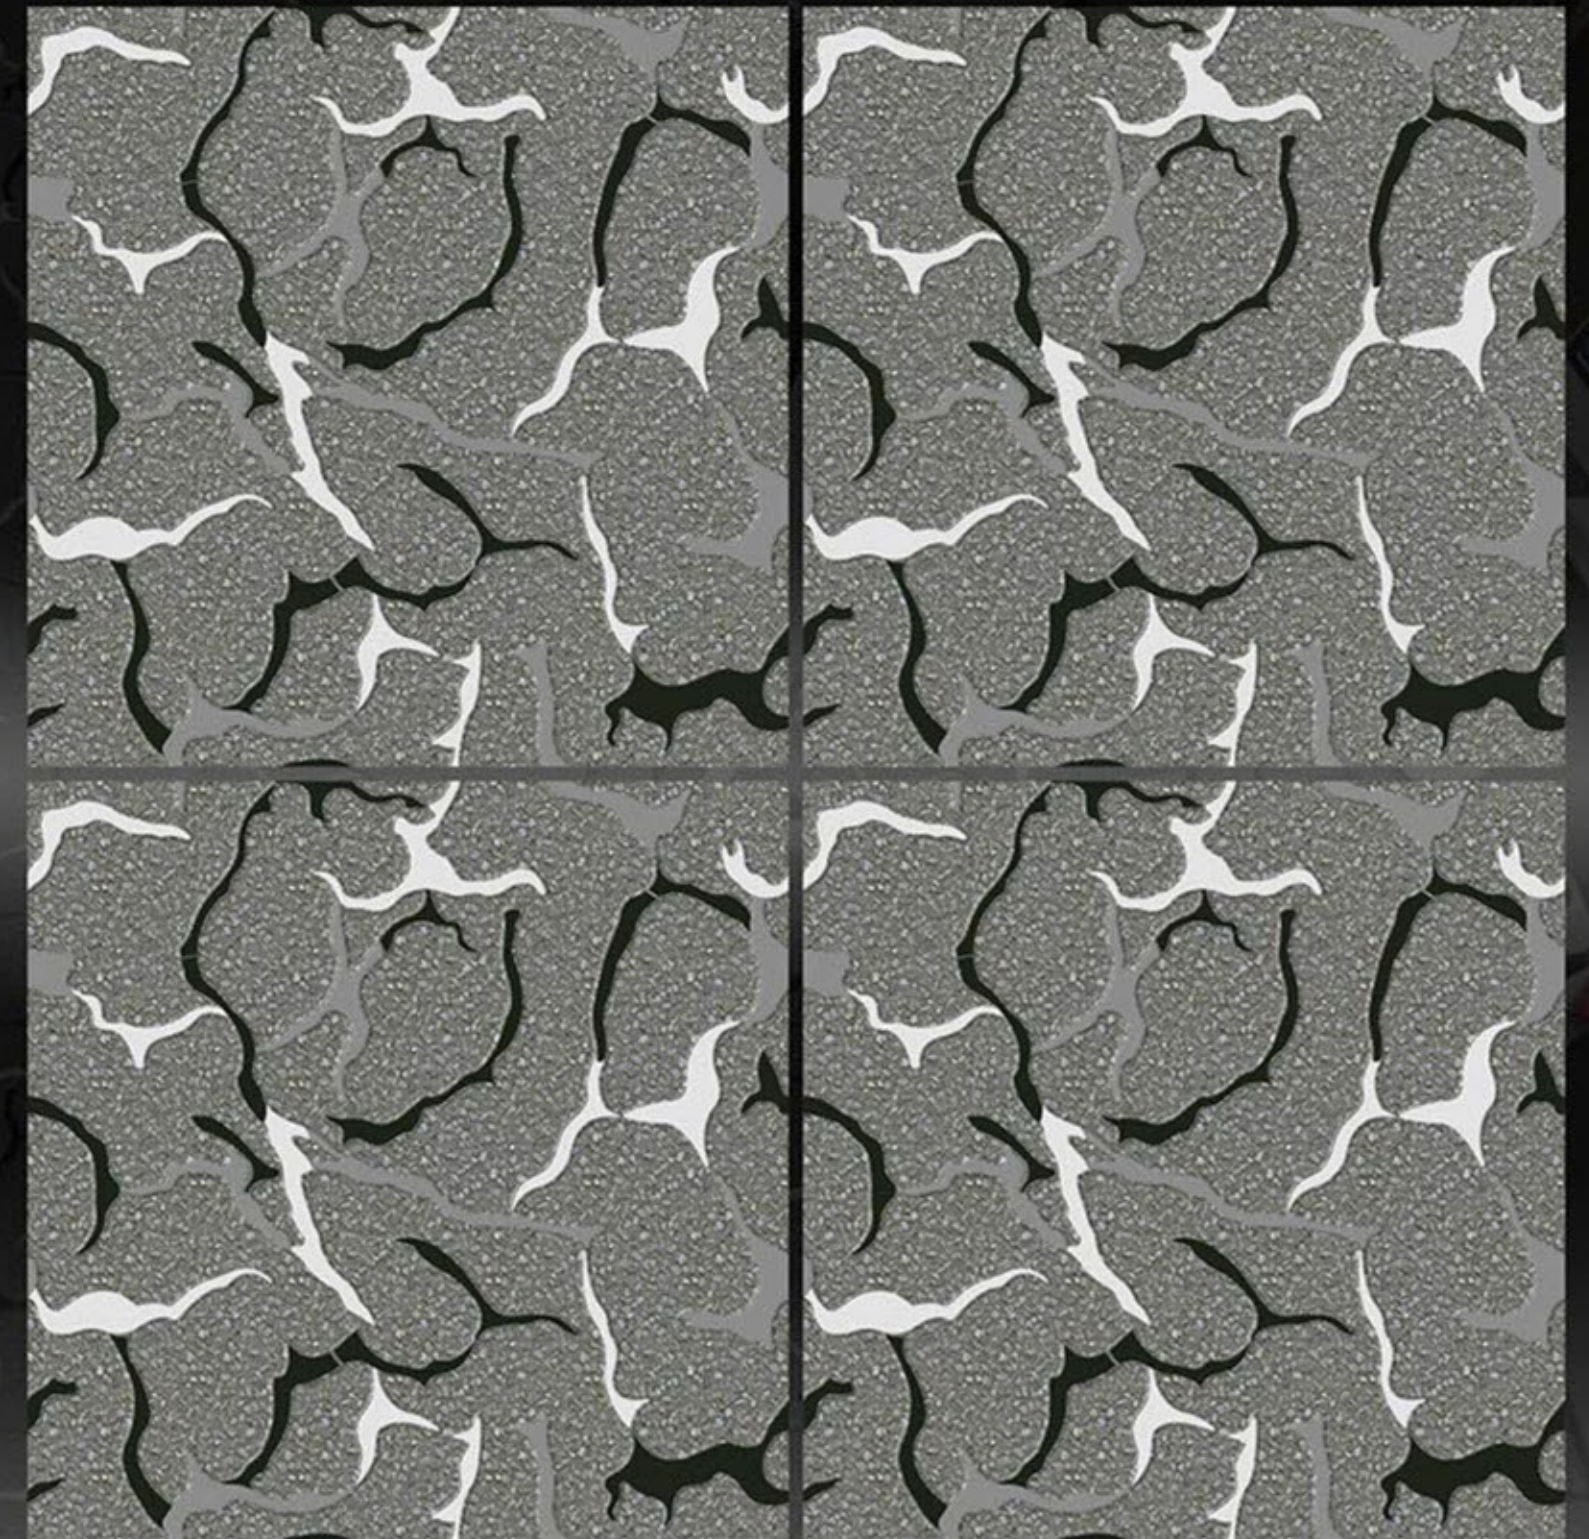


SUGAR & CARVING SERIES




VENZA-GREY

600 X 600 mm
Porcelain tiles

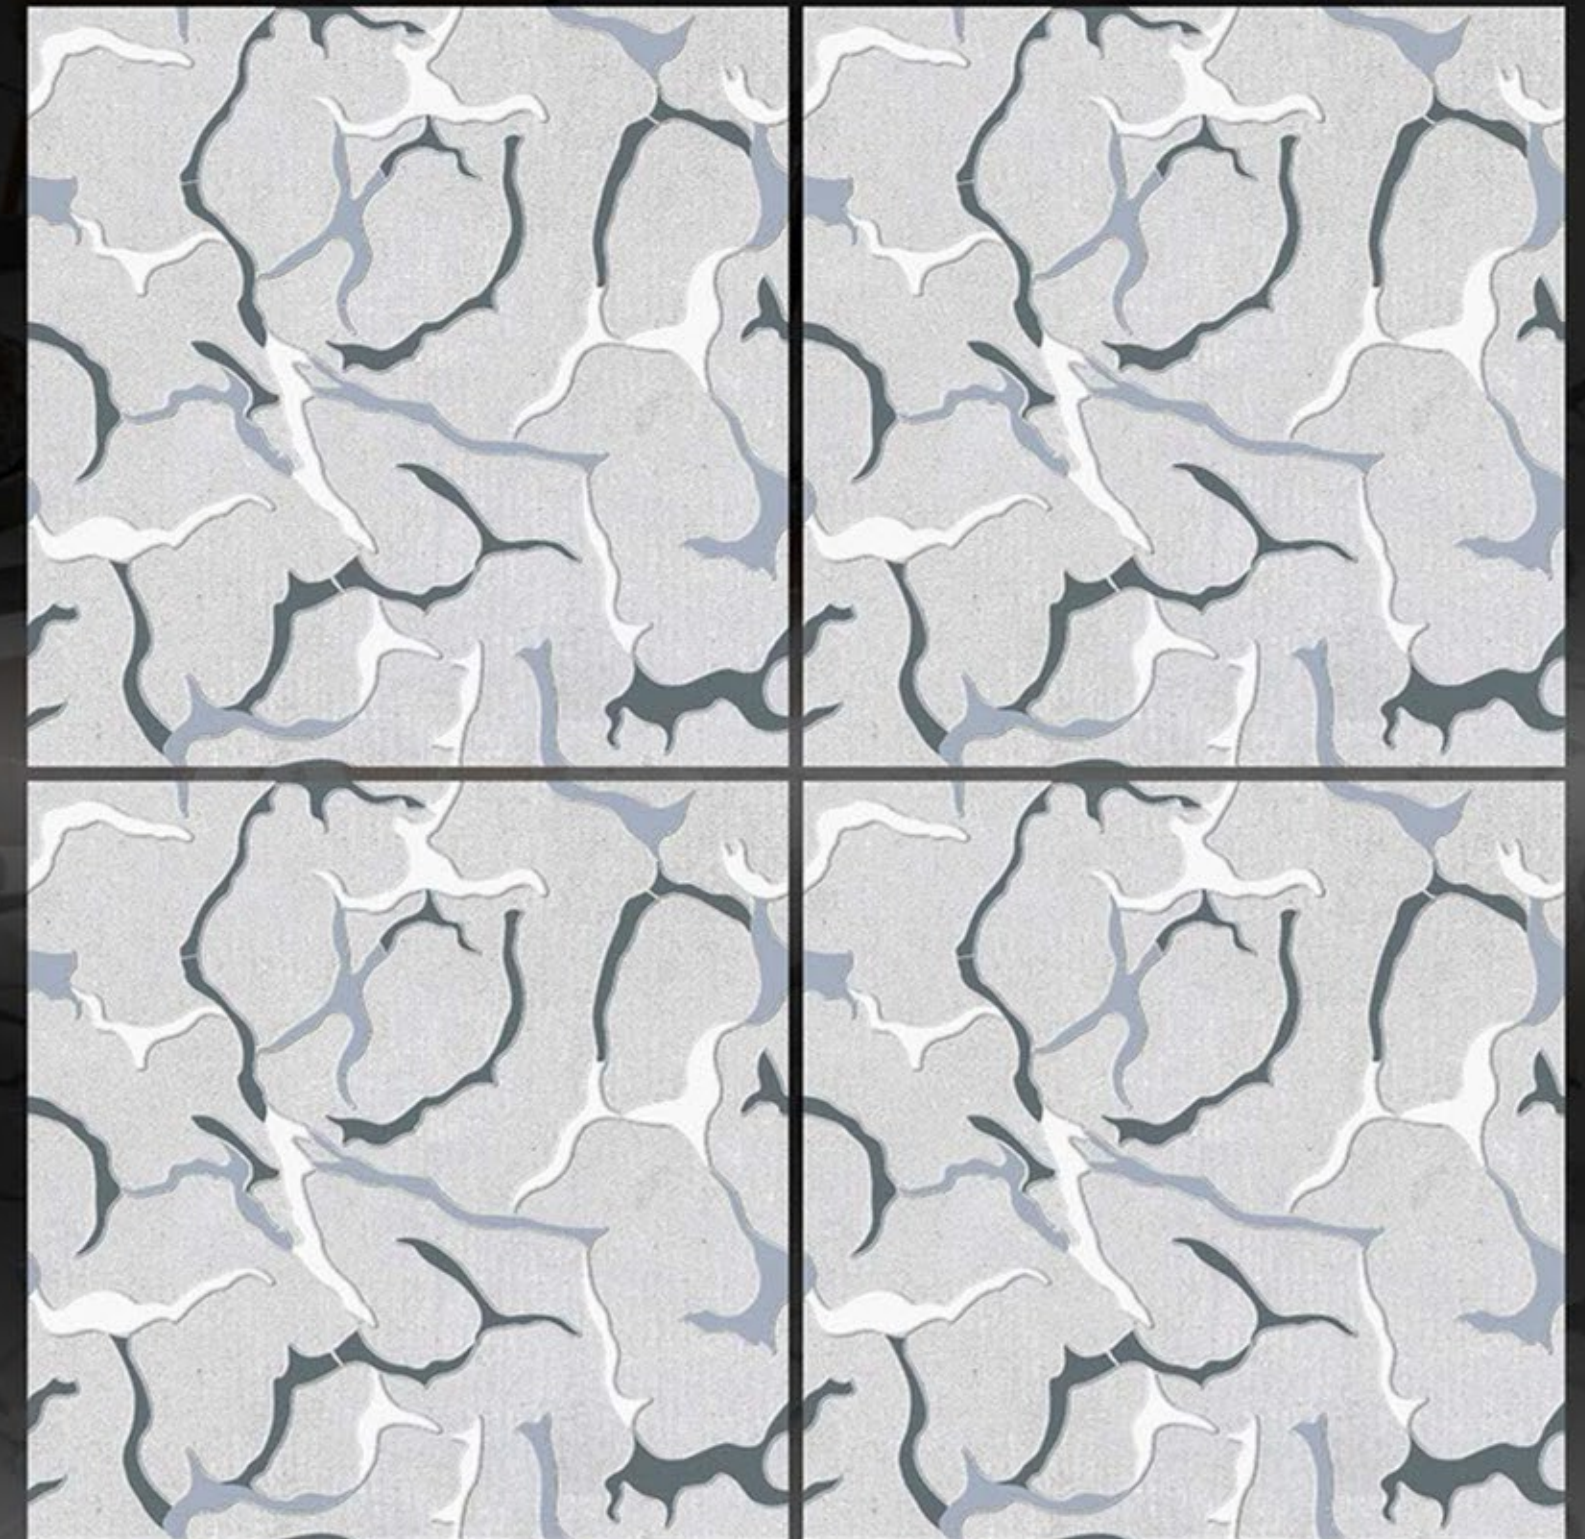


SUGAR & CARVING SERIES

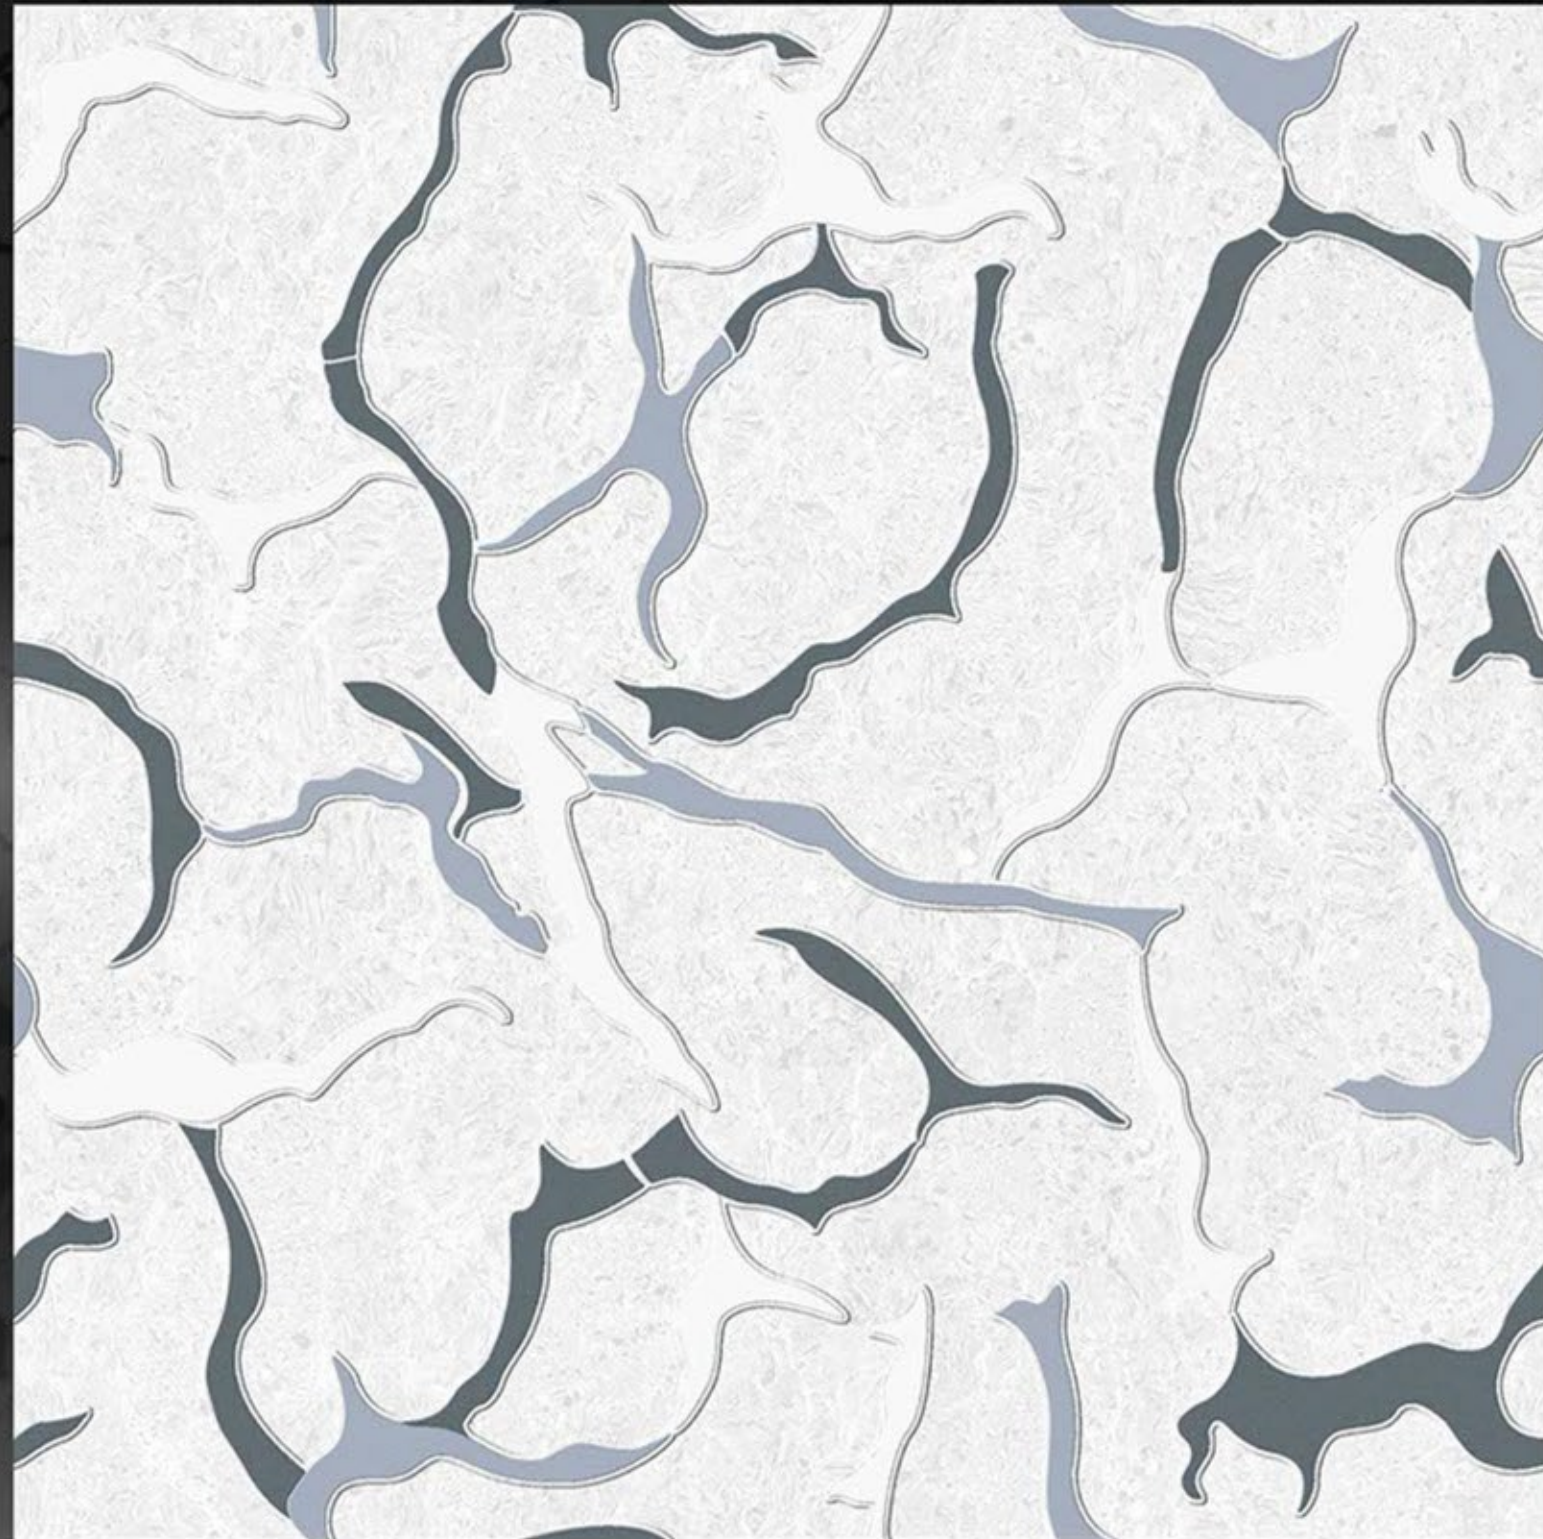

VENZA-LIGHT

600 X 600 mm
Porcelain tiles

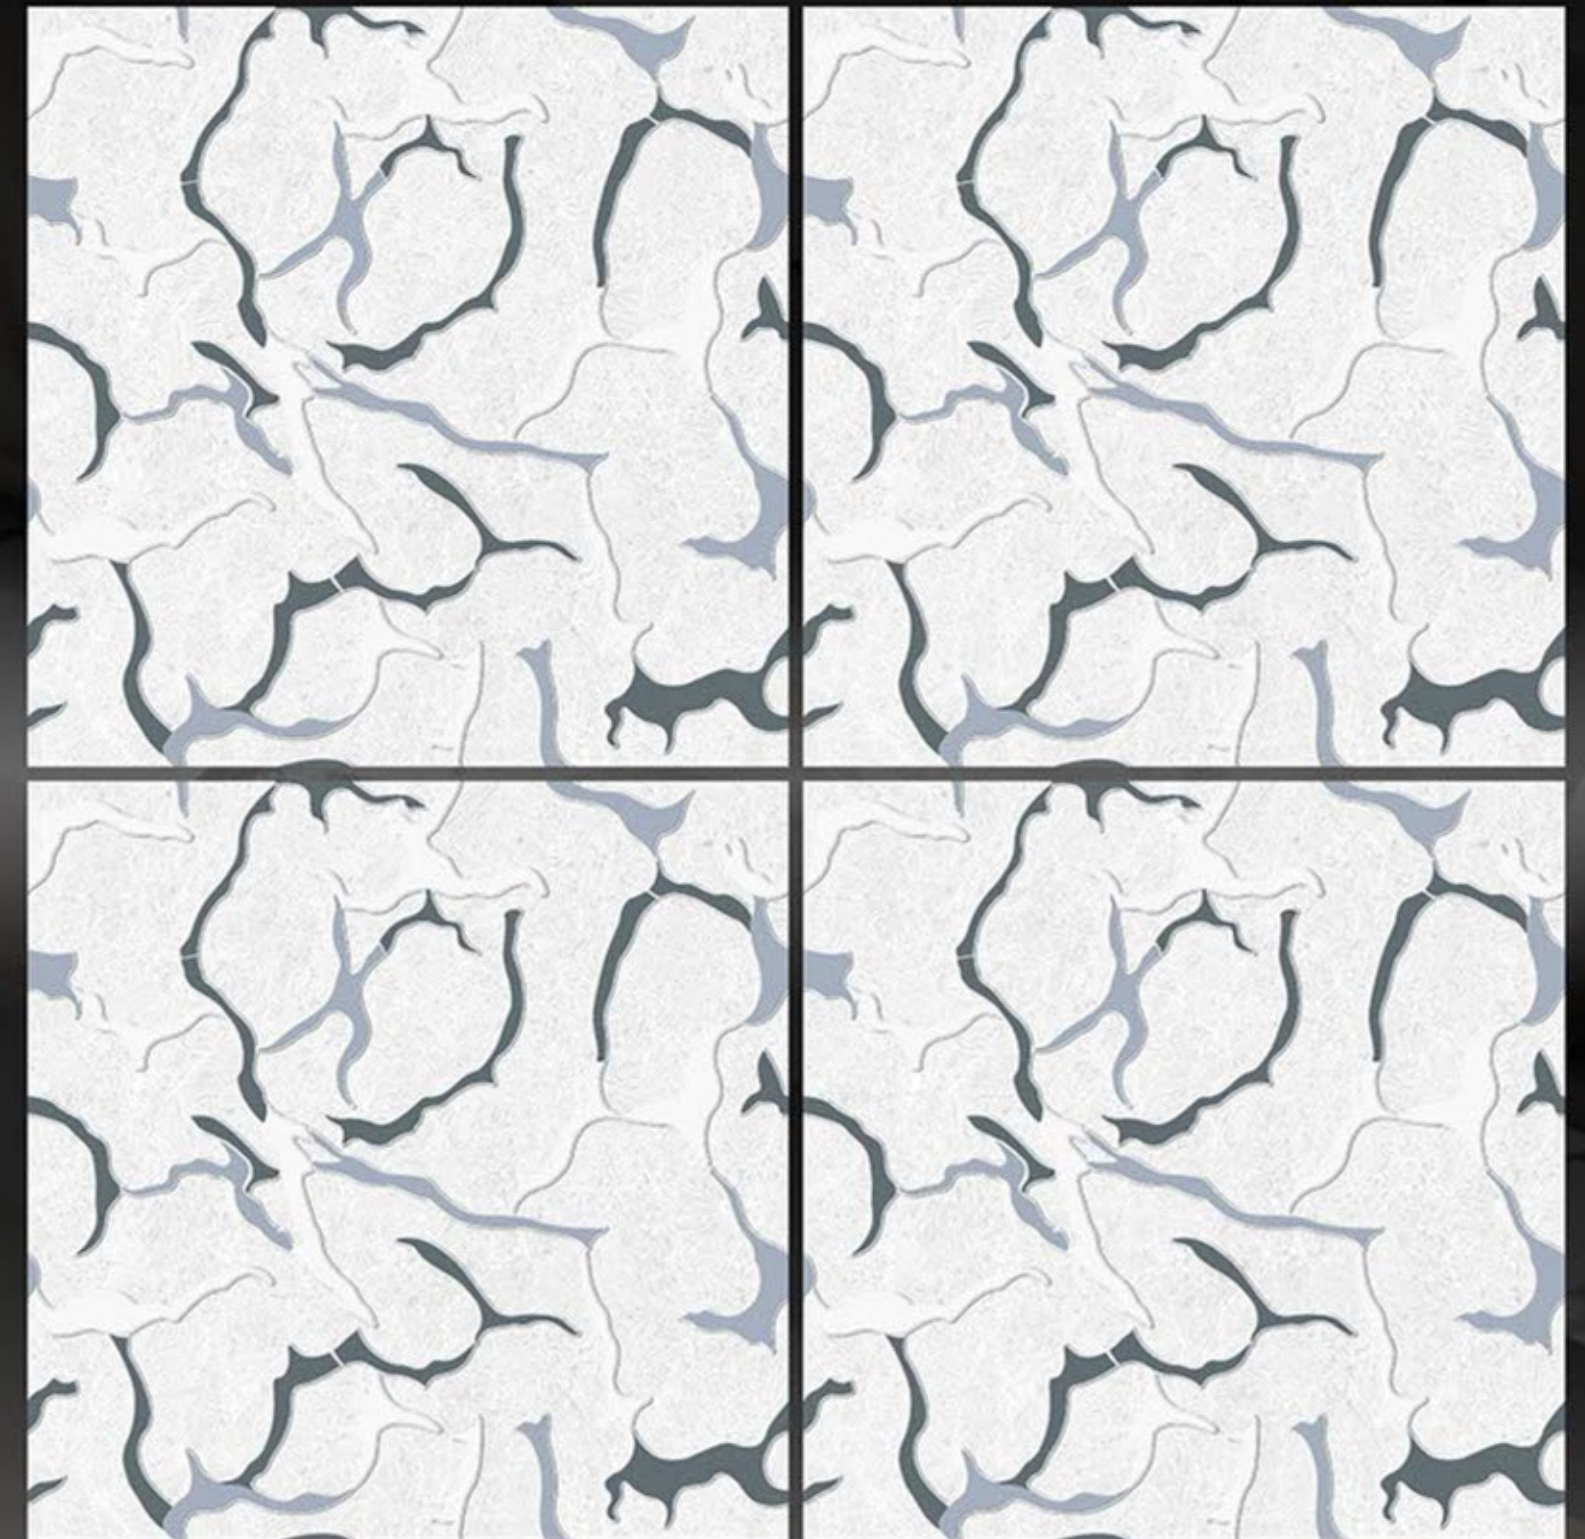


SUGAR & CARVING SERIES




VENZA-MULTY

600 X 600 mm
Porcelain tiles

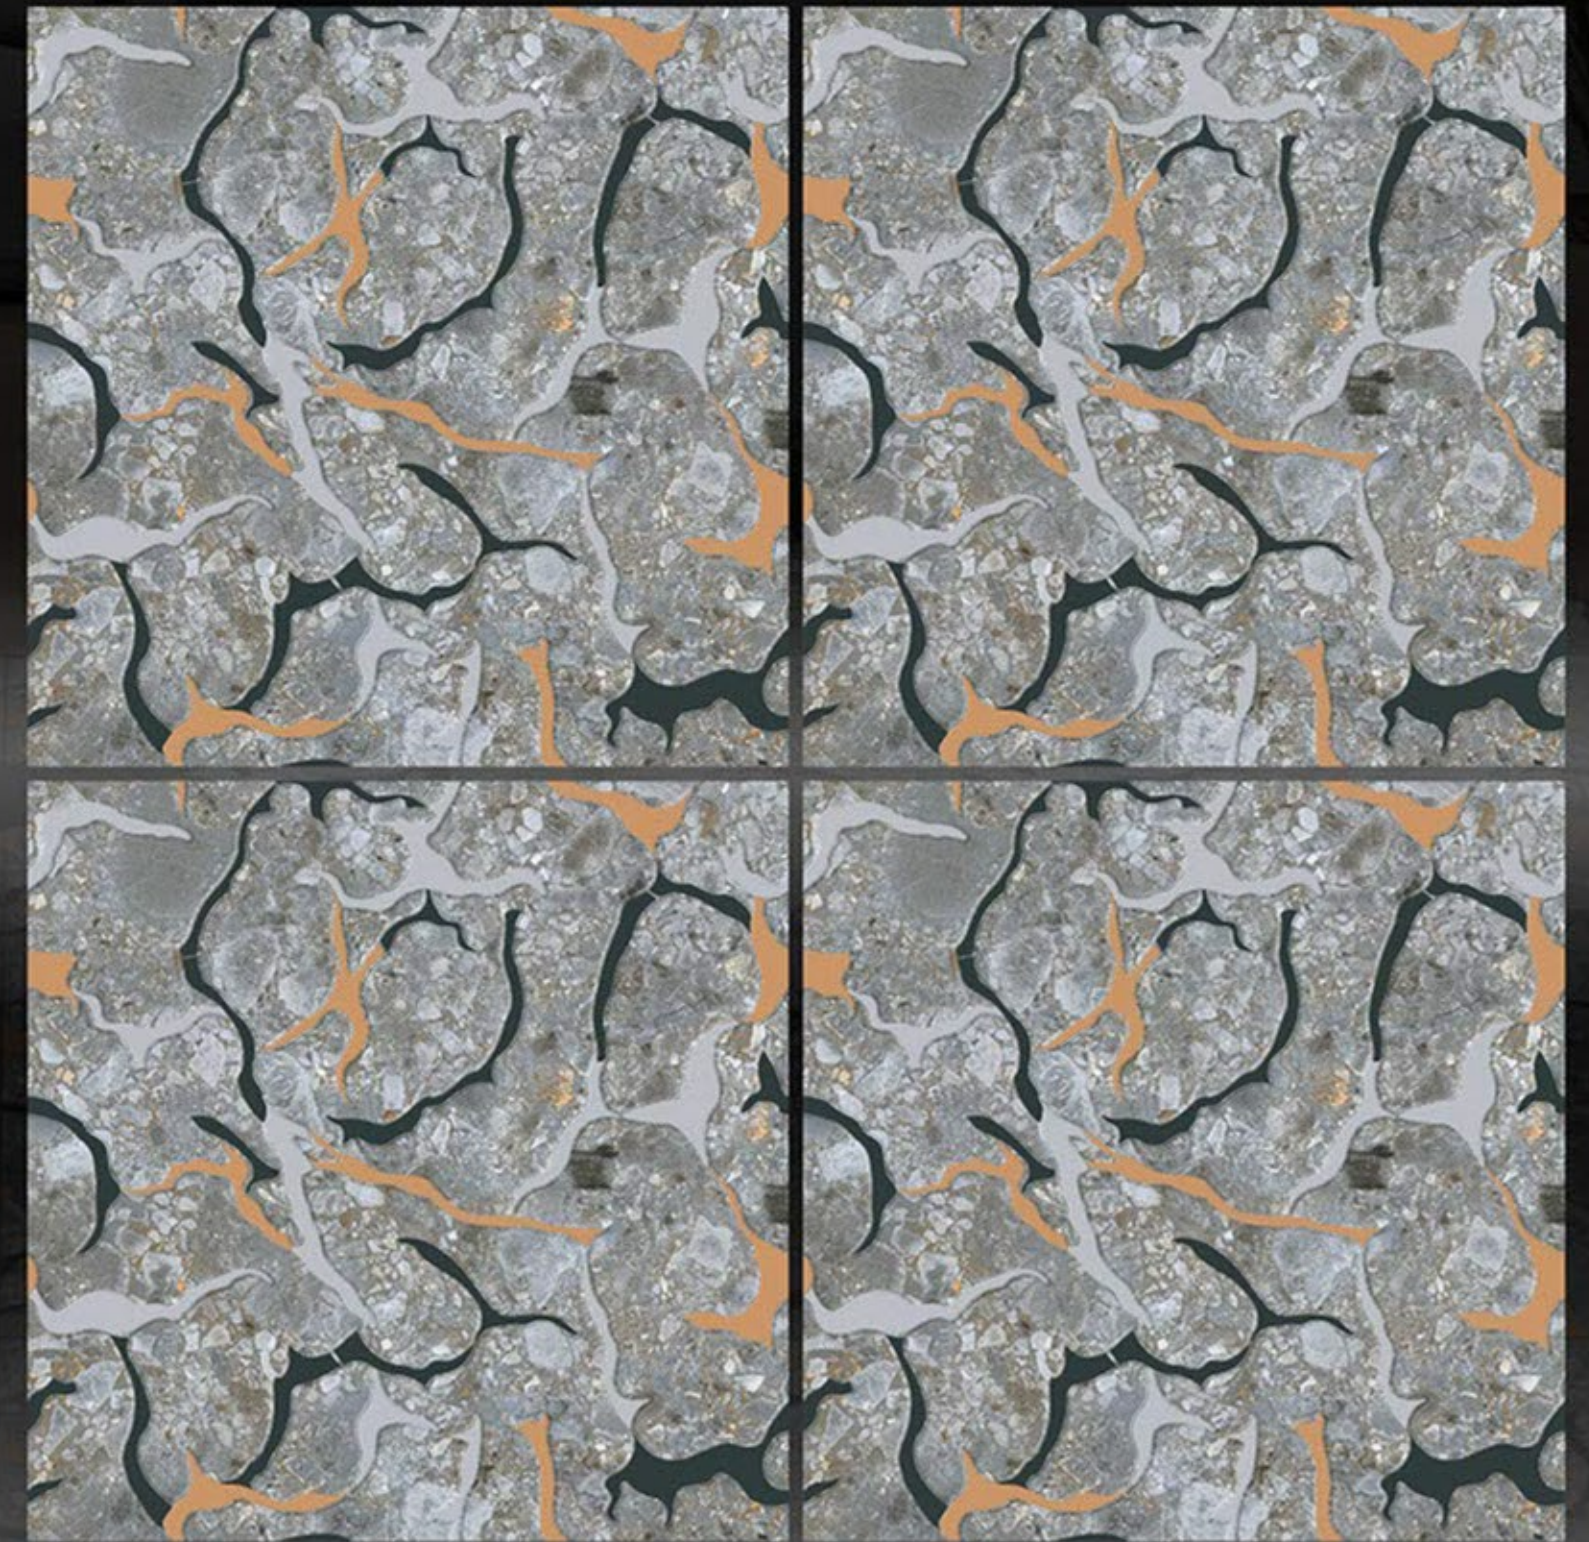


SUGAR & CARVING SERIES

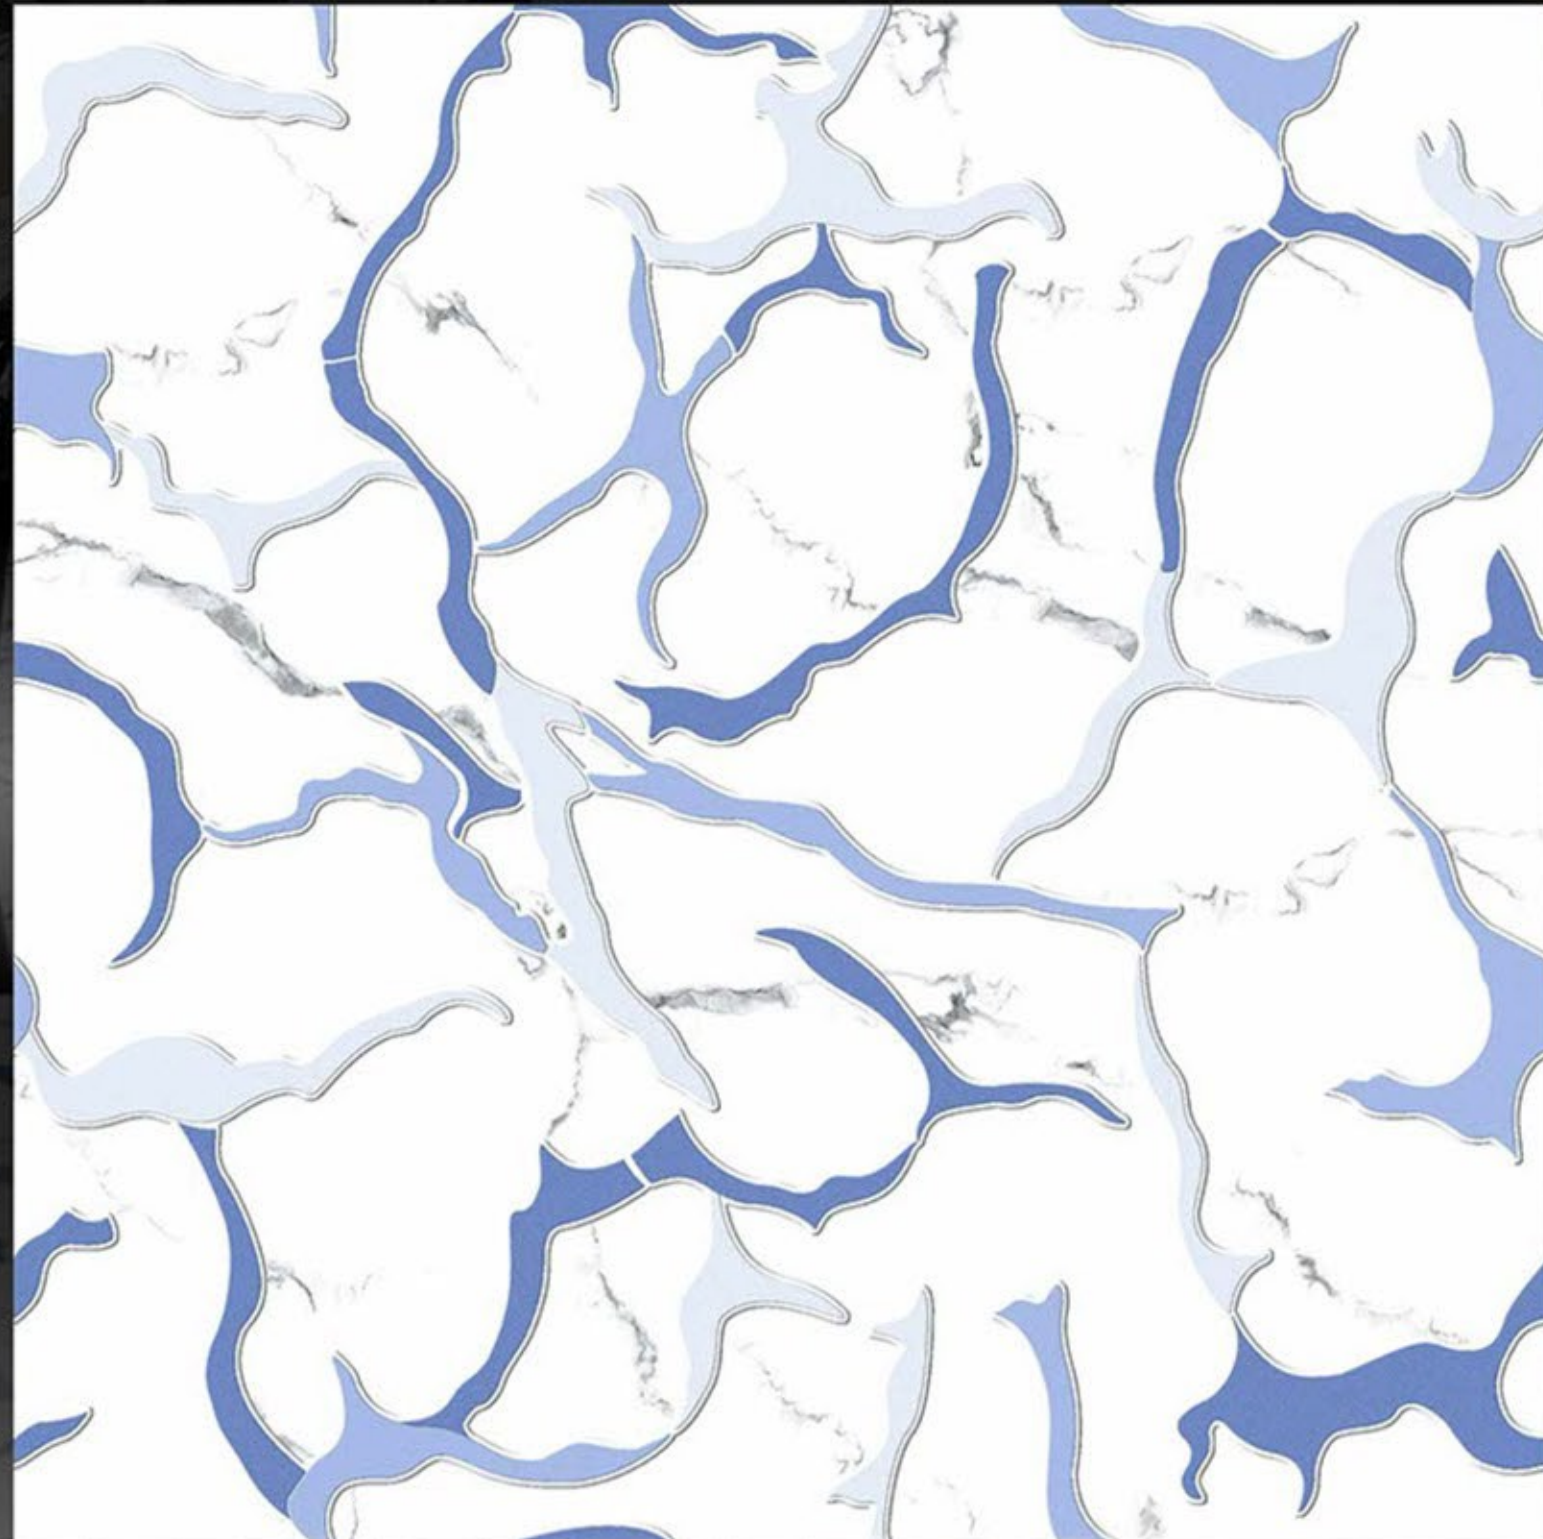

VENZA-WHITE

600 X 600 mm
Porcelain tiles

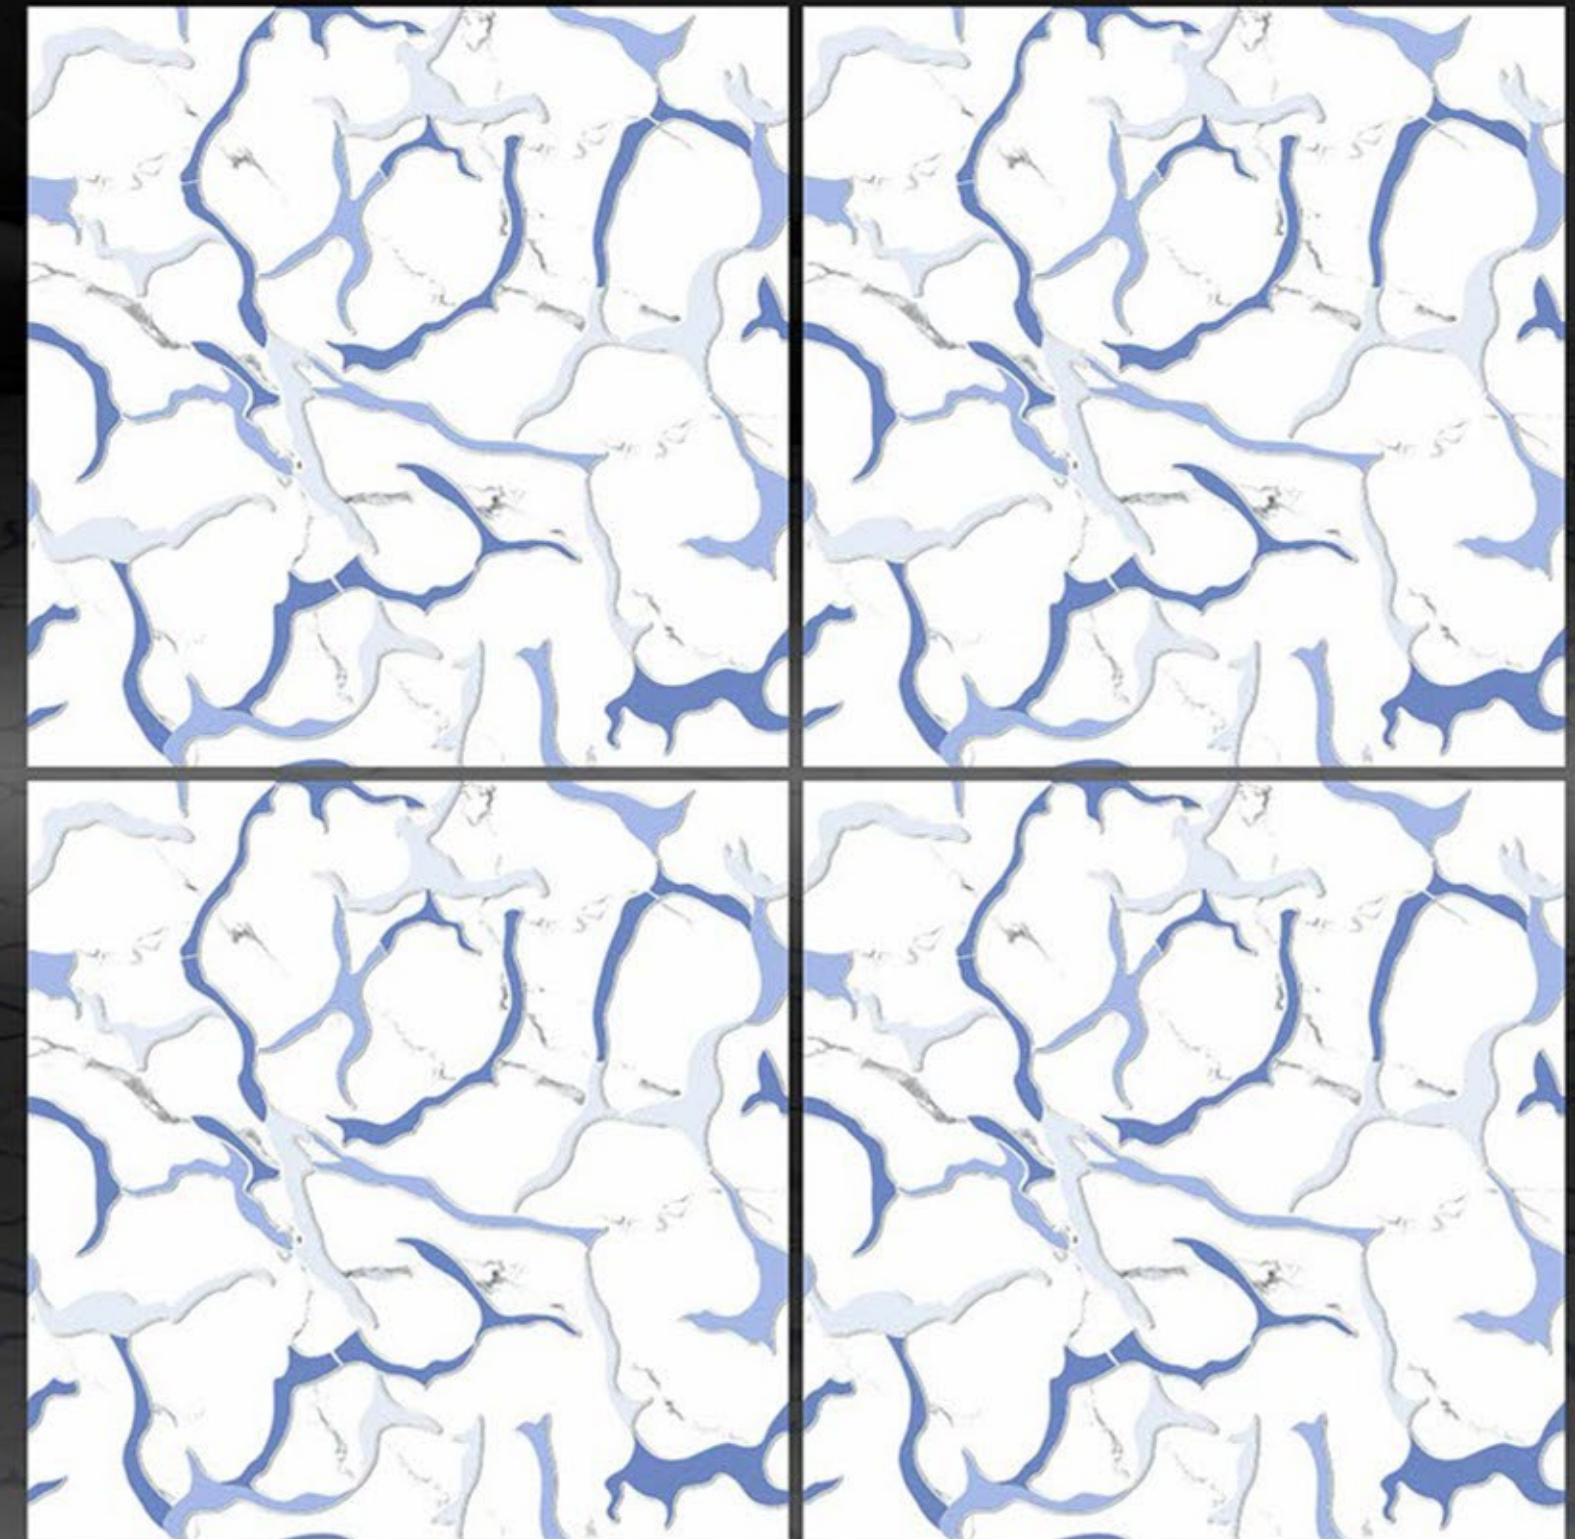

Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	±3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545- 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	Nill	Nill	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note
Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase and laying as the company dose not accept responsibility once the tiles are laid.

PACKING DETAIL

Size	Thickness	No.OF Tiles	Area Approx.	Weight Approx.
600x600 mm	9 mm	4 Pcs.	1.44 Sq. Mtr.	25.5 Kg

UTILITY OF FLOOR TILES





ULTUX GLOBAL
THE ULTRA LUXURY



+91 82009-53712

www.ultuxglobal.com

info@ultuxglobal.com